

# FI RL E HY

Tagasivoolufiltri HY filterelement

**HANSA FLEX**


## Omadused

Temperatuur min. -25 °C

Temperatuur max. 120 °C

Materjal Tihend: NBR

Töö rõhk max 20 baari

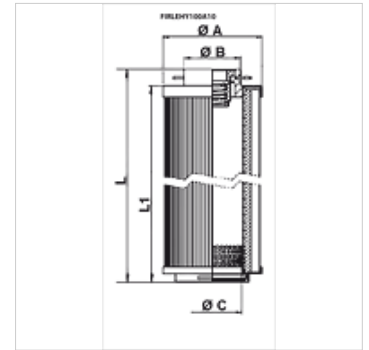

## Artikkel

Märgistus	Filtri peensus (µm)	Filtri pind (cm <sup>2</sup> )	Filter material	Ø A (mm)	Ø B (mm)	Ø C (mm)	L (mm)	L1 (mm)	Kaal (kg)
FI RL E HY 0100 A10	10,0	8785	anorgaaniline	114,0	68,3	65,0	331,00	312,50	2,44
FI RL E HY 0050 A16	16,0	610	anorgaaniline	51,5	24,0	22,0	102,50	91,50	0,23