


# FI SP E E

Filter element for spin-on filter E

**HANSA FLEX**

## Omadused

<b>Erilised tunnused</b>	$\Delta p$ max 4 baari
<b>Temperatuur min.</b>	-25 °C
<b>Temperatuur max.</b>	120 °C
<b>Materjal</b>	Tihend: NBR
<b>Töörõhk</b>	maks 12 baari
<b>Kasutamine</b>	For spin-on filters FI SP R 1, FI SP R 2, FI SP R 3

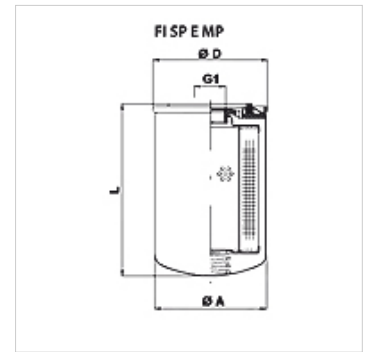

## Artikkel

Märgistus	Filtri peensus ( $\mu$ m)	Filtri pind (cm <sup>2</sup> )	Qmax (L/min)	Filter material	filtritüübile	G1	Ø A (mm)	Ø D (mm)	L (mm)	Kaal (kg)
FI SP E E 0050 P25	10,0	2419	100	organic	FI SP R 53, 58	G 3/4"	95,0	96,0	147,0	0,40

Qmaks – maksimaalne mahuvool

## Lisatarvikud

FI SP R/S FK Tagasivoolu spinnfiltri filtripea / imifilter

## on järgnevate toodete varuosad

FI SP R 1	Tagasivoolu spinnfilter, tüüp 1
FI SP R 2	Tagasivoolu spinnfilter, tüüp 2
FI SP R 3	Tagasivoolu spinnfilter, tüüp 3