


FI SP E MP

Filterelement spinnfiltrile MP

HANSA FLEX

Omadused

| | |
|-------------------|---|
| Erilised tunnused | Δp max 4 baari |
| Temperatuur min. | -25 °C |
| Temperatuur max. | 120 °C |
| Materjal | Tihend: NBR |
| Töö rõhk | maks 12 baari |
| Kasutamine | For spin-on filters FI SP R 1, FI SP R 2, FI SP R 3 |

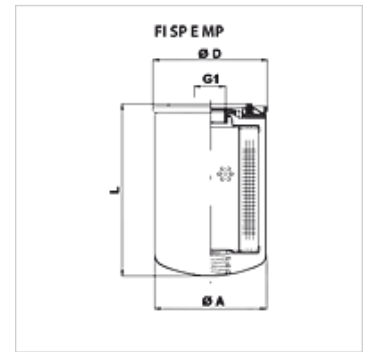

Artikkel

| Märgistus | Filtri peensus (μm) | Filtri pind (cm^2) | Qmax (L/min) | Filter material | filtritüübile | G1 | Ø A (mm) | Ø D (mm) | L (mm) | Kaal (kg) |
|---------------------|-------------------------------------|----------------------------------|-----------------|-----------------|--------------------------------------|----------|----------------------|----------------------|-----------|--------------|
| FI SP E MP 0147 A10 | 10,0 | 2419 | 100 | anorgaaniline | FI SP R 48, 55 | G 3/4" | 95,0 | 96,0 | 147,0 | 0,70 |
| FI SP E MP 0147 P10 | 10,0 | 2419 | 100 | organic | FI SP R 48, 55 | G 3/4" | 95,0 | 96,0 | 147,0 | 0,60 |
| FI SP E MP 0213 A03 | 3,0 | 3975 | 100 | anorgaaniline | FI SP R 53, 58 | G 3/4" | 96,0 | 97,0 | 213,0 | 0,93 |
| FI SP E MP 0213 A06 | 6,0 | 3975 | 100 | anorgaaniline | FI SP R 53, 58 | G 3/4" | 96,0 | 97,0 | 213,0 | 0,90 |
| FI SP E MP 0213 A10 | 10,0 | 3975 | 100 | anorgaaniline | FI SP R 53, 58 | G 3/4" | 96,0 | 97,0 | 213,0 | 0,90 |
| FI SP E MP 0213 P10 | 10,0 | 3975 | 100 | organic | FI SP R 53, 58 | G 3/4" | 96,0 | 97,0 | 213,0 | 0,80 |
| FI SP E MP 0210 P25 | 25,0 | 3875 | 100 | organic | FI SP R 53, 58 | G 3/4" | 96,0 | 97,0 | 213,0 | 0,80 |
| FI SP E MP 0182 A10 | 10,0 | 5076 | 300 | anorgaaniline | FI SP R 110, 130, 215, 280, 220, 282 | G 1,1/4" | 129,0 | 130,0 | 182,0 | 1,30 |
| FI SP E MP 0182 P10 | 10,0 | 5076 | 300 | organic | FI SP R 110, 130, 215, 280, 220, 282 | G 1,1/4" | 129,0 | 130,0 | 182,0 | 1,20 |
| FI SP E MP 0228 A06 | 6,0 | 6358 | 300 | anorgaaniline | FI SP R 115, 150, 250, 290, 255, 293 | G 1,1/4" | 129,0 | 130,0 | 228,0 | 1,47 |
| FI SP E MP 0228 A10 | 10,0 | 6358 | 300 | anorgaaniline | FI SP R 115, 150, 250, 290, 255, 293 | G 1,1/4" | 129,0 | 130,0 | 228,0 | 1,47 |
| FI SP E MP 0228 P10 | 10,0 | 6732 | 300 | organic | FI SP R 115, 150, 250, 290, 255, 293 | G 1,1/4" | 129,0 | 130,0 | 228,0 | 1,36 |

Qmaks – maksimaalne mahuvool

Lisatarvikud

FI SP R/S FK Tagasivoolu spinnfiltri filtripea / imifilter

on järgnevat toodete varuosad

| | |
|-----------|---------------------------------|
| FI SP R 1 | Tagasivoolu spinnfilter, tüüp 1 |
| FI SP R 2 | Tagasivoolu spinnfilter, tüüp 2 |
| FI SP R 3 | Tagasivoolu spinnfilter, tüüp 3 |