
K-INLINE-DRG AG IG O SEKUNDAERENTLU

Inline pressure regulators, non-self-relieving

Omadused

Tööröhk	max. 18 bar
Temperatuuri ulatus	0 °C to +60 °C
Rõhu tolerants	± 0.3 bar at 10 l/min
Korpus	Zinc
ülejäänud osad	Brass, NBR, stainless steel



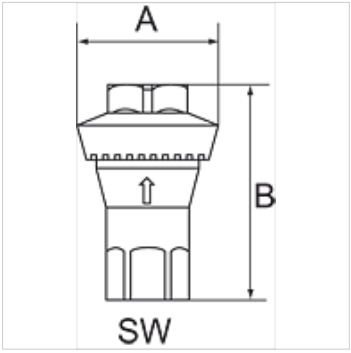

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

This single-acting diaphragm regulator can be installed in any pneumatic system. Since the pressure is preset in the factory and cannot be altered, the product is also tamper-proof. We recommend mounting the regulator directly on the tool to make sure the correct pressure is applied. In this case, the tool is never stressed by the higher pressure of the supply system and is protected against pressure fluctuations in hoses, pipes, etc. Energy efficiency and economic efficiency can be achieved by using an inline pressure regulator.

Artikkel

Märgistus	Keere	Eelseadistatud tööröhk	A (mm)	B	SW (mm)
K- 07 25 02 75	G 1/4	1 bar	34,0	52,0 mm	17
K- 07 25 02 76	G 1/4	2 bar	34,0	52,0 mm	17
K- 07 25 02 77	G 1/4	3 bar	34,0	52,0 mm	17
K- 07 25 02 78	G 1/4	4 bar	34,0	52,0 mm	17
K- 07 25 02 79	G 1/4	5 bar	34,0	52,0 mm	17
K- 07 25 02 80	G 1/4	6 bar	34,0	52,0 mm	17
K- 07 25 02 81	G 1/4	6,5 bar	34,0	52,0 mm	17
K- 07 25 02 82	G 1/4	7 bar	34,0	52,0 mm	17

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.