

K-DICHTRINGE VULKANFIBER



Sealing rings, fibre, max. temperature 75 °C

HANSA FLEX

Omadused

Temperatuur Max. +75 °C

Materjal Vulkaniseeritud kiud

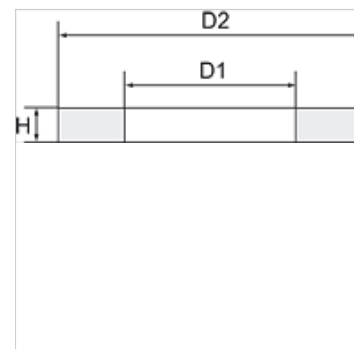

Vihje

Lisaandmed saate soovi korral.

Tellimisinfo

All seals are only sold in packaging units of 100 x. Tolerances refer to data sheets.

Artikkel

Märgistus	Keermele	D1 (mm)	D2 (mm)	H (mm)
K- 07 10 02 88	M 5	5,1	8,0	1,0
K- 07 10 02 92	G 1/2	21,0	28,0	2,0
K- 07 10 02 90	G 1/4	13,2	18,0	1,5
K- 07 10 02 91	G 3/8	16,8	22,0	1,5
K- 07 10 02 94	G 1	33,3	38,9	2,0
K- 07 10 02 93	G 3/4	26,5	33,0	2,0
K- 07 10 02 89	G 1/8	10,0	13,0	1,5