


# K-SCHL-AUFROLLER LU WA L

Hose reels for compressed air and water, lightweight type

**HANSA FLEX**

## Omadused

Voolikumaterjal	PVC
Töörõhk	max. 12 bar (K-07100622); max. 20 bar (K-07100623)
Töötemperatuur	max. +60 °C
Sisendliitmik	G 1/4
Pöördnurk	180°

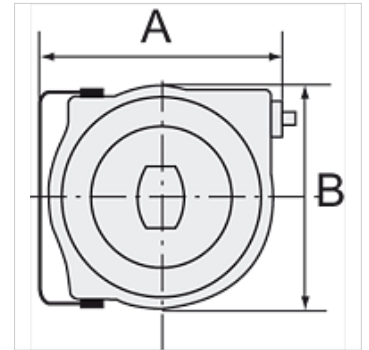

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

High-quality, impact-resistant polypropylene housing. An automatic latching mechanism allows the hose to be engaged at any length. Enclosed spring. Precise locking device for continuous feeding or stop function. Reel guide prevents excessive wear on the hose.

## Artikkel

Märgistus	Vooliku mõõt	A (mm)	B (mm)	Vooliku pikkus (m)
K- 07 10 06 22	12 mm x 8 mm	340,0	311,0	8
K- 07 10 06 23	12 mm x 6 mm	445,0	400,0	15