K-GRUNDEJEKTION SBP


Basic ejectors

HANSA-FLEX

Omadused

Omadused	Vacuum generator without control valves or system monitoring functions, with a high maximum vacuum value (85%) No moving parts, which means no wear and no maintenance Maximum suction capacity with minimum compressed air consumption Minimum size, low weight For decentralised vacuum generation in highly dynamic processes
Rakendus	For universal use in lightweight gripper systems to handle air-tight workpieces as well as for automatic separation systems, e.g. in the plastics, electronics and packaging industries. Also ideal for the construction of ejector blocks for decentralised control of suction pads.
Korpus	Plastic (impact-resistant)
Ühendus	Push-in coupling
Tööröhk	4.5 bar
Tühjendamisaste	85 %
Mürasummuti	Plastic



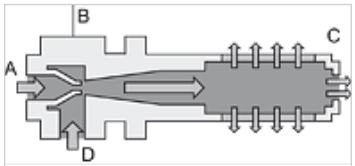

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Artikkel

Märgistus	Düüsi suurus	Suruõhuühendus	Vaakumühendus	Õhutarve imemisel (L/min)	max imivõimsus (L/min)	Mõõtmed
K- 07 45 01 13	0,5	4 mm	4 mm	14,0	8,0	71mm x 10mm x 28mm
K- 07 45 01 14	0,7	4 mm	4 mm	22,0	16,0	71mm x 10mm x 28mm
K- 07 45 01 15	1,0	6 mm	8 mm	48,0	37,7	97mm x 15mm x 40mm
K- 07 45 01 16	1,5	6 mm	8 mm	105,0	71,0	97mm x 15mm x 40mm
K- 07 45 01 17	2,0	8 mm	10 mm	197,0	127,0	168mm x 20mm x 46mm
K- 07 45 01 18	2,5	8 mm	10 mm	311,0	215,0	168mm x 20mm x 46mm

Lisatarvikud

K-GRUNDPLATTEN 1	Base plate
K-ERSATZSCHALLDAEMPFER 3	Replacement silencers
K-ERSATZSCHALLDAEMPFER 1	Replacement silencers

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.