

K-INLINE-EJEKTTOREN VR

Inline ejectors »VR«, screw connection

HANSA**FLEX**

Omadused


Omadused Vacuum generator with high maximum vacuum level (85% vacuum)
No moving parts, which means no wear and no maintenance
ultra small footprint, suitable for confined spaces
minimal air consumption
low noise

Rakendus by screwing / plugging into the distribution beam direct attachment to the suction pad for handling various workpieces

Korpus Aluminium eloxed (type VR)

Düüsisteem Brass (type VR)

Ühendus Pistikühendus

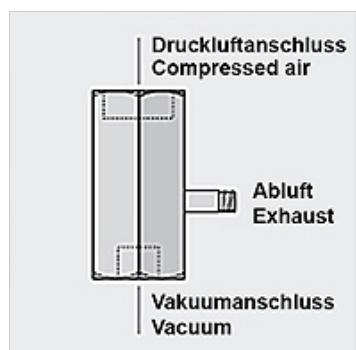

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

Artikkel

Märgistus	Düusi suurus	Heitõhu ühendus	Suruõhuühendus	Vaakumühendus	Tühjendamisaste	Õhutarve imemisel (L/min)	max imivõimsus (L/min)	Pikkus (mm)	Töörõhk (bar)
K-07 45 01 29	0,7	M 5 male	G 1/4 IG	G1/8 female	90 %	21,0	14,0	35,0	5,0
K-07 45 01 30	0,9	M 5 male	G 1/4 IG	G1/8 female	89 %	36,0	21,0	35,0	5,0