
K-INLINE-EJEKTTOREN VR

Inline ejectors »VR«, screw connection

Omadused

Omadused	Vacuum generator with high maximum vacuum level (85% vacuum) No moving parts, which means no wear and no maintenance ultra small footprint, suitable for confined spaces minimal air consumption \nlow noise
Rakendus	by screwing / plugging into the distribution beam direct attachment to the suction pad for handling various workpieces
Korpus	Aluminium eloxed (type VR)
Düüsisüsteem	Brass (type VR)
Ühendus	Pistikühendus



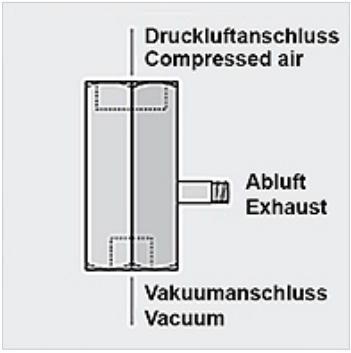

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

Artikkel

Märgistus	Düüsi suurus	Heitõhu ühendus	Suruõhuühendus	Vaakumühendus	Tühjendamisaste	Õhutarve imemisel (L/min)	max imivõimsus (L/min)	Pikkus (mm)	Tööröhk (bar)
K- 07 45 01 29	0,7	M 5 male	G 1/4 IG	G1/8 female	90 %	21,0	14,0	35,0	5,0
K- 07 45 01 30	0,9	M 5 male	G 1/4 IG	G1/8 female	89 %	36,0	21,0	35,0	5,0

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.