

K-SAUGPLATTENAUFHAENGUNG

Flexible suction pad mountings

Omadused

Rakendus	For handling of workpieces with sloping using large-area vacuum gripper Handling of large plates that can sag when lifting In combination with spring plungers to compensate height-differences and Uneveness
Erilised tunnused	very good adaptation to oblique workpiece surfaces automatic Rückstellung in die Ausgangslage vacuum-tight design with integrated protection against damage

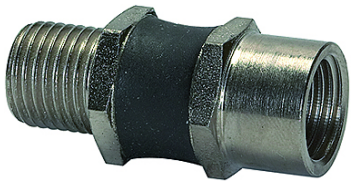

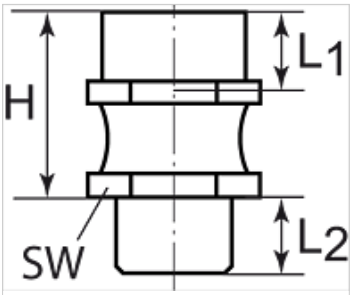

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Flexible suction pad mounting. By flexing in all directions, this mounting allows the suction pad to better adapt itself to sloping workpieces.

Artikkel

Märgistus	Sisemine keere 1	Väline keere 2	H (mm)	Materjal	L1 (mm)	L2 (mm)	Nurk W (°)	Vertikaalkoormus (N/m2)	Paindemoment (N/m2)	SW (mm)
K- 07 45 01 47	G 1/4	M 10 x 1.25	27,0	Steel, rubber	10,5	8,0	12	500	8,0	17
K- 07 45 01 48	G 1/4	G 1/4	27,0	Steel, rubber	12,0	12,0	12	750	10,0	17

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.