


K-VAKUUMSENSOR DIGITAL

Vacuum sensor, digital

HANSA FLEX

Omadused

Rakendus	Measurement of vacuum values close to the suction pad Remote evaluation of the signals Processing the output signals, for example, by PLC
Vahendid	dry, oil-free air and non-aggressive gases
Temperatuuri ulatus	0 - 50 °C
Väljundsignaal	1 to 5 analogous to V
Hüsterees	Fixed: 20 mbar (model with digital sensor)
Kaabli pikkus	3 m
Kaitse tüüp	IP 40

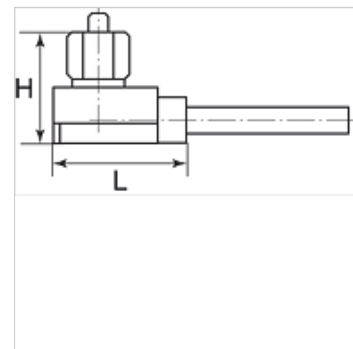

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy.

Artikkel

Märgistus	Ühendus	H (mm)	L (mm)	Mõõteulatus	Pinge
K- 07 45 01 57	M 5 male	16,9	21,0	-1 bis 0 bar	10 - 24 V DC