
K-HAND-SCHIEBEVENTIL
Manual slide valves

HANSA-FLEX

Omadused

Tööröhk	max 10 baari
Töötemperatuur	max. +70 °C



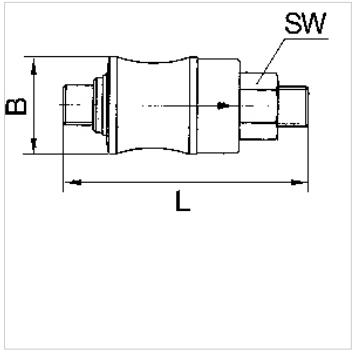

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

Artikkel

Märgistus	Keere	B (mm)	L (mm)	SW (mm)
K- 07 30 15 92	G 1/8	21,0	67,0	14
K- 07 30 15 93	G 1/4	24,0	77,0	17
K- 07 30 15 94	G 3/8	31,0	87,0	22
K- 07 30 15 95	G 1/2	35,0	104,0	26

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.