


K-DRV

Unidirectional flow control valves

HANSA FLEX

Omadused

Töörõhk	max 10 baari
Töötemperatuur	max. +70 °C
Tihendusmaterjal	NBR
Korpus	Alu eloxed
Sisedetail	Brass

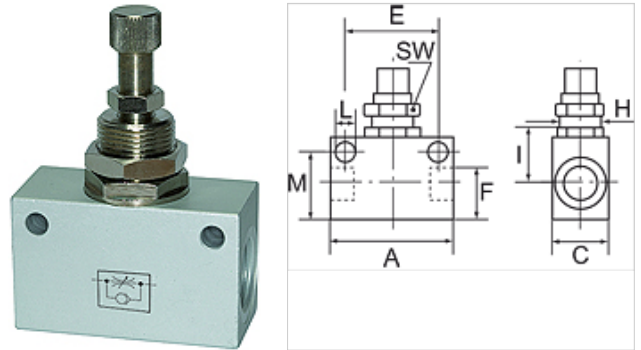

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

These valves are restricted in the flow direction and have free passage in the opposite direction.

Artikkel

Märgistus	Keere	A (mm)	C (mm)	E (mm)	H mõõtmed	I (mm)	L (mm)	M (mm)	SW (mm)
K- 07 30 12 36	M 5	25,0	12,0	18,0	M 9 x 0.75 mm	10,0	3,2	12,2	11
K- 07 30 12 37	G 1/8	34,0	16,0	24,0	M 12 x 0.75 mm	15,0	4,5	16,4	15
K- 07 30 12 38	G 1/4	50,0	25,0	35,0	M 18 x 1.5 mm	24,0	6,5	23,8	22
K- 07 30 12 39	G 3/8	58,0	25,0	40,0	M 18 x 1.5 mm	24,0	6,5	25,3	22
K- 07 30 12 40	G 1/2	65,0	30,0	50,0	M 22 x 1.5 mm	29,0	6,5	33,0	26