


# K-BKR ECKFORM IG AG 1

Ball valves, angle type, female/female thread

## Omadused

<b>Rakendusvaldkond</b>	Gas, compressed air, water, oil, weak alkaline solutions
<b>Töörõhk</b>	Liquids: 40/32 bar depending on the port size; Gas: max. 5 bar (MOP 5)
<b>Töötemperatuur</b>	-15 °C to +100 °C for liquids; -15 °C to +60 °C for gas
<b>Keeme kirjeldus</b>	R or RP thread acc. to ISO 7-1
<b>Korpus, sisedetailid</b>	Nickel-plated brass
<b>Hoob</b>	Aluminium, painted yellow
<b>Kuuli tihend</b>	PTFE
<b>Spindli tihend</b>	NBR

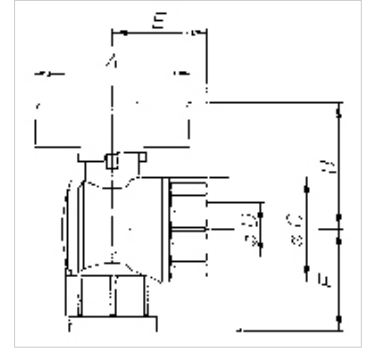

## Vihje

Lisaandmed saate soovi korral.

## Artikkel

Märgistus	DN	Keere	PN (bar)	A (mm)	B (mm)	Ø C (mm)	E (mm)	F (mm)
K- 07 30 20 42	15	Rp 1/2	40	47,0	38,0	31,0	31,0	33,0
K- 07 30 20 43	20	Rp 3/4	40	56,0	46,0	39,0	35,0	38,0
K- 07 30 20 44	25	Rp 1	40	56,0	50,0	48,0	42,0	46,0