


# K-3 BKR T DOPPELWIRKEND T2

Stainless steel ball valves, 3-way, with double-acting actuator, T-bore, normal position

**HANSA FLEX**

## Omadused

<b>Tüüp</b>	Pneumatic actuators, in double- or single acting version, with integrated end-position feedback
<b>Puurimine</b>	T-kujuline
<b>Töö rõhk</b>	max. 63 bar (depending on temperature and nominal size)
<b>Töötemperatuur</b>	-20 °C to +70 °C
<b>Pöördnurk</b>	90 °
<b>Normeeritud liidesed</b>	Interface actuator / valve: four or eight threaded holes in the drive housing according to EN ISO 5211, Interface actuator / S
<b>Juhtimisrõhk</b>	5.5 bar
<b>Ventiili adapter</b>	Acc. to NAMUR
<b>Ajam</b>	aluminium eloxed
<b>Ajami tihend</b>	NBR
<b>Kuulkraan</b>	Stainless steel 1.4401, with ISO-flange plate
<b>Kuulkraani tihend</b>	PTFE/FKM

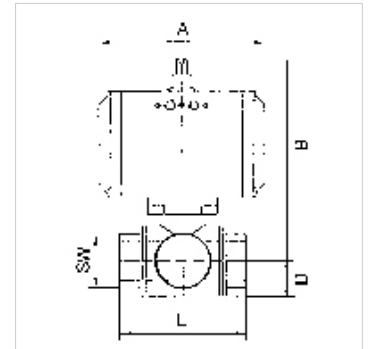

## Vihje

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)  
Lisaandmed saate soovi korral.

## Kirjeldus

3-way cock, reduced bore

## Lisateave

Other T-positions on request

## Artikkel

Märgistus	DN	Keere	Asend	A (mm)	B (mm)	D (mm)	L (mm)	SW (mm)
K- 07 30 03 00	15	Rp 1/2	T 2	116,0	130,0	20,0	73,0	27
K- 07 30 03 02	20	Rp 3/4	T 2	116,0	136,0	23,0	80,0	32
K- 07 30 03 04	25	Rp 1	T 2	133,0	148,5	28,5	90,0	41
K- 07 30 03 06	32	Rp 1 1/4	T 2	133,0	153,5	36,5	90,0	50
K- 07 30 03 08	40	Rp 1 1/2	T 2	137,0	173,0	37,0	105,0	55
K- 07 30 03 10	50	Rp 2	T 2	161,0	196,5	47,5	115,0	71