


K-MV 3/2 230 V, 50 - 60 HZ

3/2-way solenoid valves, normally closed, directly operated, 230 V, 50 to 60 Hz

HANSA FLEX

Omadused

Elektriühendus	For Pg 11P connector socket, acc. to ISO 4400
Kaitse tüüp	IP65 (with connector socket fitted)
Keerme kirjeldus	Rp thread acc. to ISO 7-1
Korpus, klapipesa	Brass
Sisedetail	Stainless steel
Tihend	Perbunan (NBR)

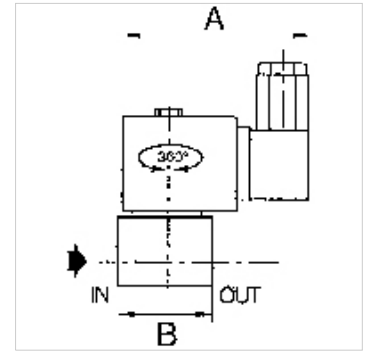

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Artikkel

Märgistus	Keere	maksimaalne töö rõhk (bar)	NW	A (mm)	B (mm)	Ehitustüüp
K- 07 30 22 52	Rp 1/8	7	2,4	75,0	30,0	7
K- 07 30 22 53	Rp 1/4	6	3,2	80,0	43,0	10