


K-MV 3/2 ELK

Solenoid valves

HANSA FLEX

Omadused	
Kaitse tüüp	IP65 (with connector socket fitted)
Aine temperatuur	-10 °C to +100 °C
Õhutusühendus	M 5
Rakendus	Compressed air and neutral, non-toxic gases, not suitable for liquids
Töörõhk	min. 0,0 bar; max. 15,0 bar
Elektriline komponent	system connection plug, 180° movement, PG7 exchangeable magnetic heads AC/DC
Nimilaisus	1,2 mm
Keskkonnatemperatuur	-10 °C to +60 °C
Korpus	Brass
Sisedetail	Stainless steel
Tihendid	FPM

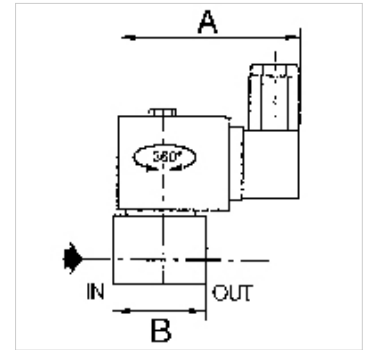

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Directly operated seat valve with spring return and manual operator. Also suitable for vacuum operation.

Artikkel

Märgistus	Keere	Pinge	A (mm)	B (mm)
K- 07 30 22 50	G 1/8	230/50 V AC, 50 Hz	58,0	33,0
K- 07 30 22 51	G 1/8	24 V DC	58,0	33,0