
K-NADELVENTILE VA

Needle valves

Omadused

Tööröhk	max. 400 bar (at 20 °C); max. 250 bar (at G 1 - 20 ° C)
Töötemperatuur	-20 °C to +120 °C
Tihendusmaterjal	PTFE
Korpus	Stainless steel 1.4571
Käsiratas	Plastic
Materjal	sealing: PTFE



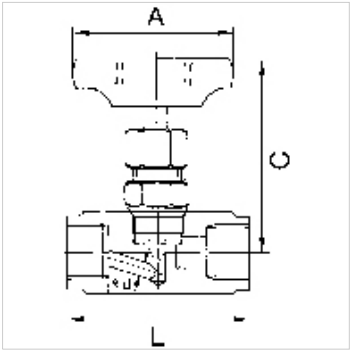

Vihje

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)
Lisaandmed saate soovi korral.

Tellimisinfo

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

Lisateave

Port sizes G 1 1/4, G 1 1/2 and G 2 available on request

Artikkel

Märgistus	DN	Keere	A (mm)	C (mm)	L (mm)
K- 07 30 24 03	4	G 1/8	50,0	74,0	50,0
K- 07 30 24 04	5	G 1/4	50,0	73,0	50,0
K- 07 30 24 05	6	G 3/8	50,0	72,0	55,0
K- 07 30 24 06	8	G 1/2	63,0	83,0	60,0
K- 07 30 24 07	10	G 3/4	63,0	100,0	75,0
K- 07 30 24 08	12	G 1	80,0	110,0	100,0

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.