


# K-HOCHLEIST SCHALLDAEMP

High-performance silencers

**HANSA FLEX**

## Omadused

|                   |  |
|-------------------|--|
| Töötemperatuur    | -10 °C to +90 °C   |
| Paigaldusasend    | Any  |
| Paisrõhk (sisend) | Max. 6 bar   |
| Materjal          | Steel housing powder coated, perforated sheet galvanized steel, polyester felt discs |

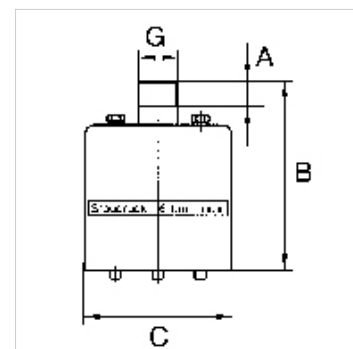

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Multi-chamber silencers with a high blow-off rate, short exhaust time and excellent silencing effect.

## Artikkel

| Märgistus      | Läbivool 6 bar | Keere   | A<br>(mm) | B<br>(mm) | C<br>(mm) |
|----------------|----------------|---------|-----------|-----------|-----------|
| K- 07 40 14 31 | 13350 l/min    | G 1/2   | 14,0      | 103,0     | 80,0      |
| K- 07 40 14 32 | 16700 l/min    | G 3/4   | 16,0      | 106,0     | 80,0      |
| K- 07 40 14 33 | 23350 l/min    | G 1     | 18,0      | 130,0     | 110,0     |
| K- 07 40 14 34 | 31700 l/min    | G 1 1/4 | 20,0      | 136,0     | 110,0     |
| K- 07 40 14 35 | 53400 l/min    | G 1 1/2 | 24,0      | 168,0     | 150,0     |
| K- 07 40 14 36 | 56700 l/min    | G 2     | 24,0      | 168,0     | 150,0     |