



K-RD STUECKE 3 1

Reducers

HANSA FLEX

Omadused

Töörõhk	Max. 16 bar (at +20 °C)
Töötemperatuur	-20 °C to +70 °C
Materjal	Nikeldatud messing
Surverõngas	Hostaform (black nickel-plated for Ø 10, 12)
O-rõngas	NBR, siliconefree
Pingutustangid	Stainless steel AISI 316

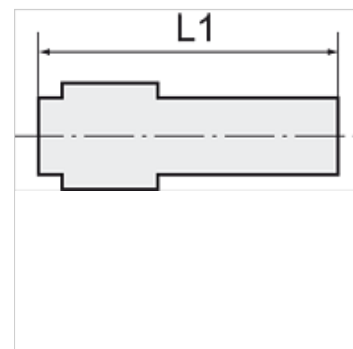

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Economy yet very high-quality series of push-in fittings made of nickel-plated brass. Compact, space-saving, lightweight design. An O-ring in the fillet at the end of the thread guarantees a tight connection for all male thread parts, even on rough surfaces.

Artikkel

Märgistus	L1 (mm)	Voolikühendus (mm)	Liitmik (mm)
K- 07 40 29 94	30,5	4	6
K- 07 40 29 95	33,5	6	8
K- 07 40 29 96	37,5	6	10
K- 07 40 29 97	38,0	8	10