



# K-XV AGM

Double nipples, parallel male thread

**HANSA FLEX**

## Omadused

|          |                         |
|----------|-------------------------|
| Töörõhk  | Max. 20 bar             |
| Materjal | Roostevaba teras 1.4571 |

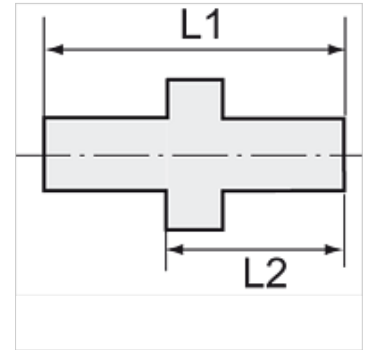

## Vihje

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.  
Lisaandmed saate soovi korral.

## Lisateave

Further types and dimensions on request.

## Artikkel

| Märgistus      | Keere 1 | Keere 2 | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|---------|---------|------------|------------|-------|
| K- 07 40 11 98 | M 5     | M 5     | 13,0       | 8,0        | 7 mm  |
| K- 07 40 11 99 | M 5     | G 1/8   | 17,0       | 12,0       | 14 mm |
| K- 07 40 12 00 | M 5     | G 1/4   | 21,0       | 14,0       | 17 mm |
| K- 07 40 11 95 | G 1/8   | G 1/8   | 21,0       | 13,0       | 14 mm |
| K- 07 40 11 97 | G 1/8   | G 1/4   | 22,0       | 14,0       | 17 mm |
| K- 07 40 11 96 | G 1/8   | G 3/8   | 25,0       | 16,0       | 19 mm |
| K- 07 40 12 01 | G 1/4   | G 1/4   | 23,0       | 14,0       | 17 mm |
| K- 07 40 12 03 | G 1/4   | G 3/8   | 24,0       | 15,0       | 19 mm |
| K- 07 40 12 02 | G 1/4   | G 1/2   | 27,0       | 18,0       | 24 mm |
| K- 07 40 12 04 | G 3/8   | G 3/8   | 25,0       | 15,0       | 19 mm |
| K- 07 40 12 06 | G 3/8   | G 1/2   | 27,0       | 17,0       | 24 mm |
| K- 07 40 12 05 | G 3/8   | G 3/4   | 36,0       | 24,0       | 32 mm |
| K- 07 40 12 07 | G 1/2   | G 1/2   | 29,0       | 17,0       | 24 mm |
| K- 07 40 12 09 | G 1/2   | G 3/4   | 33,0       | 21,0       | 32 mm |
| K- 07 40 12 08 | G 1/2   | G 1     | 40,0       | 24,0       | 36 mm |
| K- 07 40 12 12 | G 3/4   | G 3/4   | 33,0       | 21,0       | 32 mm |
| K- 07 40 12 10 | G 3/4   | G 1     | 40,0       | 24,0       | 36 mm |
| K- 07 40 12 11 | G 1     | G 1     | 42,0       | 26,0       | 36 mm |