



K-XV AGM

Double nipples, parallel male thread

HANSA FLEX

Omadused

Töörõhk	Max. 20 bar
Materjal	Roostevaba teras 1.4571

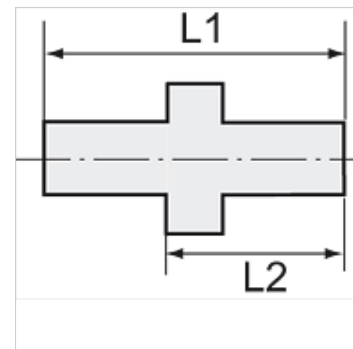

Vihje

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Lisaandmed saate soovi korral.

Lisateave

Further types and dimensions on request.

Artikkel

Märgistus	Keere 1	Keere 2	L1 (mm)	L2 (mm)	SW
K- 07 40 11 98	M 5	M 5	13,0	8,0	7 mm
K- 07 40 11 99	M 5	G 1/8	17,0	12,0	14 mm
K- 07 40 12 00	M 5	G 1/4	21,0	14,0	17 mm
K- 07 40 11 95	G 1/8	G 1/8	21,0	13,0	14 mm
K- 07 40 11 97	G 1/8	G 1/4	22,0	14,0	17 mm
K- 07 40 11 96	G 1/8	G 3/8	25,0	16,0	19 mm
K- 07 40 12 01	G 1/4	G 1/4	23,0	14,0	17 mm
K- 07 40 12 03	G 1/4	G 3/8	24,0	15,0	19 mm
K- 07 40 12 02	G 1/4	G 1/2	27,0	18,0	24 mm
K- 07 40 12 04	G 3/8	G 3/8	25,0	15,0	19 mm
K- 07 40 12 06	G 3/8	G 1/2	27,0	17,0	24 mm
K- 07 40 12 05	G 3/8	G 3/4	36,0	24,0	32 mm
K- 07 40 12 07	G 1/2	G 1/2	29,0	17,0	24 mm
K- 07 40 12 09	G 1/2	G 3/4	33,0	21,0	32 mm
K- 07 40 12 08	G 1/2	G 1	40,0	24,0	36 mm
K- 07 40 12 12	G 3/4	G 3/4	33,0	21,0	32 mm
K- 07 40 12 10	G 3/4	G 1	40,0	24,0	36 mm
K- 07 40 12 11	G 1	G 1	42,0	26,0	36 mm