
# K-TR AG


Male hose fittings with parallel male thread

HANSA-FLEX

## Omadused

| | |
|---|---|
| **Tööröhk** | Max. 20 bar |
| **Materjal** | Roostevaba teras 1.4571 |



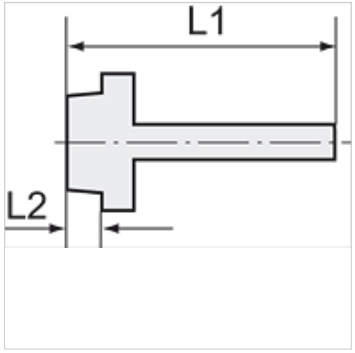


## Vihje

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Lisaandmed saate soovi korral.

## Lisateave

Further types and dimensions on request.

## Artikkel

| Märgistus | Keere | Vooliku jaoks | L1 (mm) | L2 (mm) | SW |
|---|---|---|---|---|---|
| **K- 07 40 13 26** | M 5 | LW 4 mm | 15,5 | 5,0 | 8 mm |
| **K- 07 40 49 69** | M 5 | LW 6 mm | 23,5 | 5,0 | 9 mm |
| **K- 07 40 13 27** | G 1/8 | LW 4 mm | 41,5 | 9,0 | 14 mm |
| **K- 07 40 13 28** | G 1/8 | LW 6 mm | 41,5 | 9,0 | 14 mm |
| **K- 07 40 49 71** | G 1/8 | LW 8 mm | 36,0 | 7,0 | 14 mm |
| **K- 07 40 13 29** | G 1/8 | LW 9 mm | 48,5 | 10,0 | 17 mm |
| **K- 07 40 13 12** | G 1/4 | LW 4 mm | 48,5 | 10,0 | 17 mm |
| **K- 07 40 13 13** | G 1/4 | LW 6 mm | 48,5 | 10,0 | 17 mm |
| **K- 07 40 49 17** | G 1/4 | LW 8 mm | 39,0 | 9,0 | 17 mm |
| **K- 07 40 49 21** | G 1/4 | LW 10 mm | 39,0 | 9,0 | 17 mm |
| **K- 07 40 13 15** | G 1/4 | LW 9 mm | 48,5 | 10,0 | 17 mm |
| **K- 07 40 13 14** | G 1/4 | LW 13 mm | 48,5 | 10,0 | 19 mm |
| **K- 07 40 13 16** | G 3/8 | LW 4 mm | 48,5 | 10,0 | 19 mm |
| **K- 07 40 13 17** | G 3/8 | LW 6 mm | 48,5 | 10,0 | 19 mm |
| **K- 07 40 49 27** | G 3/8 | LW 8 mm | 39,0 | 9,0 | 19 mm |
| **K- 07 40 13 19** | G 3/8 | LW 9 mm | 48,5 | 10,0 | 19 mm |
| **K- 07 40 49 30** | G 3/8 | LW 10 mm | 39,0 | 9,0 | 19 mm |
| **K- 07 40 13 18** | G 3/8 | LW 13 mm | 48,5 | 10,0 | 19 mm |
| **K- 07 40 13 20** | G 1/2 | LW 6 mm | 48,5 | 10,0 | 24 mm |
| **K- 07 40 49 37** | G 1/2 | LW 8 mm | 42,0 | 11,0 | 24 mm |
| **K- 07 40 13 21** | G 1/2 | LW 9 mm | 48,5 | 10,0 | 24 mm |
| **K- 07 40 49 40** | G 1/2 | LW 10 mm | 42,0 | 11,0 | 24 mm |
| **K- 07 40 13 22** | G 1/2 | LW 13 mm | 50,0 | 10,0 | 24 mm |
| **K- 07 40 49 43** | G 1/2 | LW 16 mm | 53,0 | 11,0 | 24 mm |
| **K- 07 40 49 44** | G 1/2 | LW 19 mm | 53,0 | 11,0 | 24 mm |
| **K- 07 40 13 23** | G 3/4 | LW 9 mm | 50,5 | 11,0 | 27 mm |
| **K- 07 40 13 24** | G 3/4 | LW 13 mm | 52,0 | 11,0 | 27 mm |
| **K- 07 40 13 25** | G 3/4 | LW 19 mm | 50,5 | 11,0 | 27 mm |
| **K- 07 40 49 57** | G 1 | LW 19 mm | 55,0 | 13,0 | 38 mm |
| **K- 07 40 49 58** | G 1 | LW 25 mm | 55,0 | 13,0 | 38 mm |
| **K- 07 40 49 67** | G 1 | LW 32 mm | 55,0 | 13,0 | 38 mm |

*Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.*