


# K-SCHLAUCHTUELLEN ES

Hose fittings

**HANSA FLEX**

## Omadused

<b>Töörõhk</b>	Max. 20 bar
<b>Materjal</b>	Roostevaba teras 1.4571

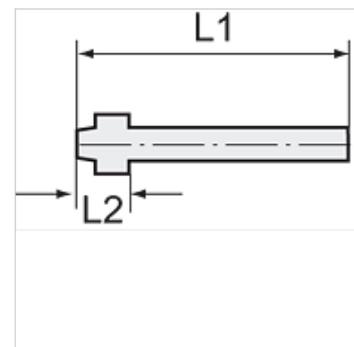

## Vihje

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.  
Lisaandmed saate soovi korral.

## Lisateave

Further types and dimensions on request.

## Artikkel

Märgistus	Vooliku jaoks	Torumutrile	L1 (mm)	L2 (mm)
K- 07 40 16 51	LW 6 mm	G 1/8	33,5	6,0
K- 07 40 16 44	LW 4 mm	G 1/4	47,0	13,5
K- 07 40 16 45	LW 6 mm	G 1/4	47,0	13,5
K- 07 40 16 46	LW 9 mm	G 1/4	47,0	14,0
K- 07 40 16 47	LW 6 mm	G 3/8	48,5	15,0
K- 07 40 16 48	LW 9 mm	G 3/8	48,5	15,0
K- 07 40 16 49	LW 9 mm	G 1/2	48,5	15,0
K- 07 40 16 50	LW 13 mm	G 1/2	48,5	15,0