


# K-SV MS NI

Bulkhead connectors - nickel-plated brass

**HANSA FLEX**

## Omadused

|                |                    |
|----------------|--------------------|
| Töötemperatuur | Max. 150 °C        |
| Surve          | Max. 60 bar        |
| Materjal       | Nikeldatud messing |

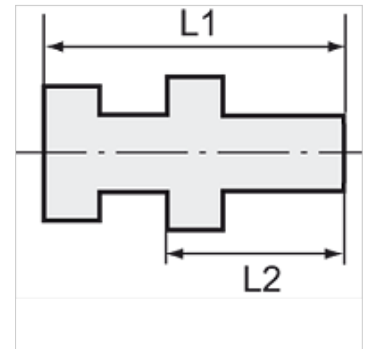

## Vihje

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.  
Lisaandmed saate soovi korral.

## Kirjeldus

Suitable for air, water, oil, steam, etc.

## Lisateave

Further types and dimensions on request.

## Artikkel

| Märgistus      | Väliskeere | Sisekeere | L1<br>(mm) | L2<br>(mm) | SW1<br>(mm) | SW2<br>(mm) |
|----------------|------------|-----------|------------|------------|-------------|-------------|
| K- 07 40 34 27 | M 16 x 1.5 | G 1/8     | 18,0       | 14,0       | 22          | 19          |
| K- 07 40 34 28 | M 20 x 1.5 | G 1/4     | 26,0       | 21,0       | 24          | 27          |
| K- 07 40 34 29 | M 26 x 1.5 | G 3/8     | 26,0       | 21,0       | 32          | 30          |
| K- 07 40 34 30 | M 28 x 1.5 | G 1/2     | 33,5       | 27,0       | 32          | 36          |