


K-K VERTEILER MS ALU

X-distributors

HANSA FLEX

Omadused

Töörõhk max 10 baari

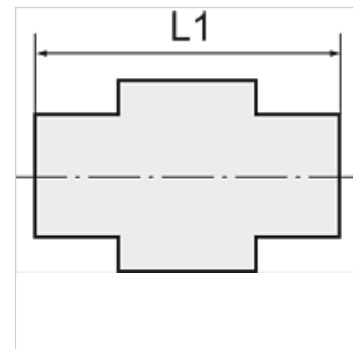

Vihje

Lisaandmed saate soovi korral.

Artikkel

| Märgistus | Keere | L1 (mm) | SW | Materjal |
|----------------|-------|------------|-------|------------|
| K- 07 40 14 46 | M 5 | 14,0 | 8 mm | Messing |
| K- 07 40 14 47 | G 1/8 | 23,0 | 16 mm | Messing |
| K- 07 40 14 48 | G 1/4 | 30,0 | 22 mm | Messing |
| K- 07 40 14 49 | G 3/8 | 40,0 | 25 mm | Alumiinium |
| K- 07 40 14 50 | G 1/2 | 50,0 | 30 mm | Alumiinium |