

K-VTL KUGELHAEHNE

Distributor block

Omadused

Paigaldus	2 mounting holes in housing (screw size M 5)
Rõhuvahemik	Max. +10 bar, rough vacuum
Temperatuuri ulatus	-10 °C to +100 °C
Kuulkraani keere	G 1/4
Korpus	Die-cast aluminium
Kuul, spindel	Ms 58, chrome-plated
Kuuli tihend	PTFE
O-rõngas	NBR



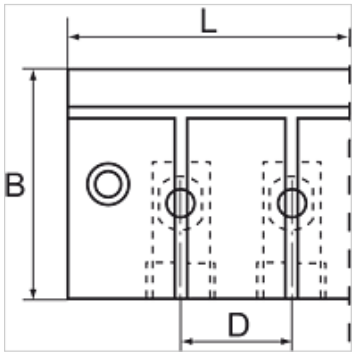

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Distributor and isolator block for machines and installations where it is necessary to close individual circuits. This block contains 6, 8 or 10 ball valves that can be adjusted using a screwdriver.
Valves are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

Artikkel

Märgistus	Kuulkraanide arv	Keermeväljund	Keermesisend	B (mm)	D (mm)	L (mm)
K- 07 40 40 46	6	G 3/8	G 3/8"	52,0	25,0	175,0
K- 07 40 40 47	8	G 3/8	G 3/8"	52,0	25,0	225,0
K- 07 40 40 45	10	G 3/8	G 3/8"	52,0	25,0	275,0

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.