


K-VTST 2 AB MS

Distributor pieces, brass, with 2 outlets

HANSA FLEX

Omadused

| | |
|---------|---|
| Ühendus | G 3/4 and G 1 incl. PTFE-sealing at outer thread, G 1 1/4 without sealing |
| Töörõhk | max 10 baari |

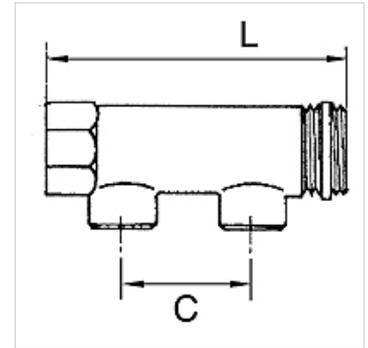

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

For assembling compressed air taps. End fittings with 1 x male and 1 x female thread, outlets optionally with male or female thread.

Artikkel

| Märgistus | Väljundi ühendus | Sisendi ühendus | C (mm) | L (mm) |
|----------------|------------------|-----------------|--------|--------|
| K- 07 40 40 49 | 2 x 1/2 male | 2 x 3/4 | 50,0 | 110,0 |
| K- 07 40 40 50 | 2 x 1/2 female | 2 x 3/4 | 50,0 | 110,0 |
| K- 07 40 40 51 | 2 x 1/2 male | 2 x 1 | 50,0 | 113,0 |
| K- 07 40 40 52 | 2 x 1/2 female | 2 x 1 | 50,0 | 113,0 |
| K- 07 40 40 53 | 2 x 1/2 male | 2 x 1 1/4 | 60,0 | 137,0 |
| K- 07 40 40 54 | 2 x 1/2 female | 2 x 1 1/4 | 60,0 | 137,0 |