



K-DRGREDV

Pressure reducing valves

HANSA FLEX

Omadused

Sisendrõhk	Max. 15 bar
Ühendus	G 1/4 internal / external
Materjal	Messing

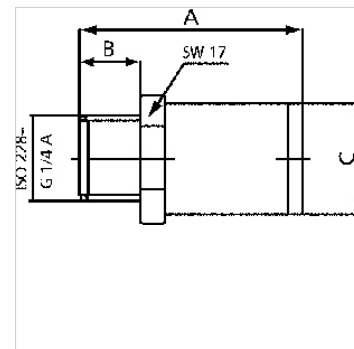

Vihje

Dependent on the input pressure P1, the initial pressure P2 can vary between -20% to +20%
Lisaandmed saate soovi korral.

Kirjeldus

Industry, trade and repair shops often require working pressures of 15 bar or less. These pressure reducing valves, which are screwed directly onto the tool, enable the actually necessary working pressure to be set.
Benefits: Significantly reduced risk of accidents, Longer tool life with fewer malfunctions, Lower noise levels at the workplace.

Artikkel

Märgistus	Seadistusrõhk	max läbivool (L/min)	A (mm)	B	Ø C (mm)	SW (mm)
K- 07 25 19 31	2,0	300	34,0	9,0 mm	17,0	17
K- 07 25 02 00	3,0	360	34,0	9,0 mm	17,0	17
K- 07 25 02 01	4,0	380	34,0	9,0 mm	17,0	17
K- 07 25 02 02	5,0	390	34,0	9,0 mm	17,0	17
K- 07 25 02 03	6,0	405	34,0	9,0 mm	17,0	17
K- 07 25 19 32	7,0	415	34,0	9,0 mm	17,0	17
K- 07 25 19 33	8,0	420	34,0	9,0 mm	17,0	17