


K-GROSSDRUCKREGLER

Large pressure regulators

HANSA FLEX

Omadused

Sisendrõhk	Max. 40 bar
Aine temperatuur	max. 60 °C
Keskonnatemperatuur	Max. 90 °C
Läbivool	2500 l/min
Tihendusmaterjal	NBR
Korpus	Aluminium
Läbivoolu väärtuse mõõtmine	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar

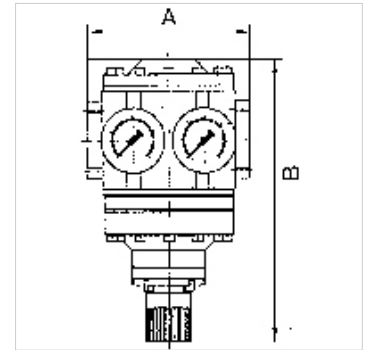

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Diaphragm pressure regulators, independent of inlet pressure, with internal pilot control and self-relieving design. Separate indication of input and working pressure on two pressure gauges. The pressure setting can be locked by pushing the button down. We recommend always using these controllers in conjunction with our K-07250615 and K-07250615 filters.

Artikkel

Märgistus	Keere	Reguleerimisvahemik	A (mm)	B	DN
K- 07 25 08 11	G 1 1/2	0.5 - 6 bar	180,0	246,0 mm	50
K- 07 25 08 12	G 1 1/2	0.5 - 10 bar	180,0	246,0 mm	50
K- 07 25 08 13	G 1 1/2	0.5 - 16 bar	180,0	246,0 mm	50
K- 07 25 08 14	G 1 1/2	0.5 - 25 bar	180,0	246,0 mm	50
K- 07 25 08 15	G 2	0.5 - 6 bar	160,0	246,0 mm	50
K- 07 25 08 16	G 2	0.5 - 10 bar	160,0	246,0 mm	50
K- 07 25 08 17	G 2	0.5 - 16 bar	160,0	246,0 mm	50
K- 07 25 08 18	G 2	0.5 - 25 bar	160,0	246,0 mm	50

Varuosad

K-HALTERBAUSATZ	Holder
K-VERSCHLEI-SATZ	Set of wearing parts
K-XV AGM 2	Double nipples, parallel male thread