K-FI REGL METALLBEHAE S MANO MULTIF


Filter regulators with metal bowl and sight glass, incl. pressure gauge

HANSA-FLEX

Omadused

Sisendrõhk	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
Aine temperatuur	max. 60 °C
Keskkonnatemperatuur	Max. 60 °C
Filterelemendi pooride suurus	5 µm (C55: 40 µm)
Tihendusmaterjal	NBR
Vedrukate	POM-brass
Korpus	Die-cast zinc, Aluminium for G 1 variant
Drain valve	Semi-automatic
Läbivoolu väärtuse mõõtmine	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar



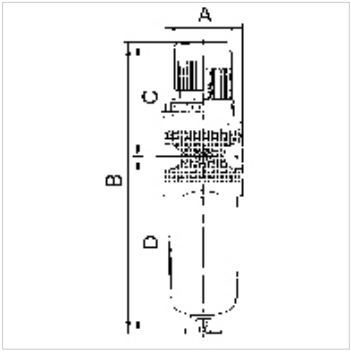

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Reversible diaphragm pressure regulators, independent of inlet pressure, with secondary ventilation, in combination with a centrifugal separator. The pressure setting can be locked by pressing in the handwheel.

Tellimisinfo

Filter regulators with bowl guard and metal bowl are also available with control ranges of 0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar. Please ask for more information. Lockable filter regulators available on request.

Artikkel

Märgistus	Keere	Reguleerimisvahemik	Läbivool (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Ehitussuurus
K- 07 25 00 68	G 1/4	0.5 - 10 bar	1500	47,8	192,0 mm	67,0	125,5	6	1
K- 07 25 00 72	G 3/8	0.5 - 10 bar	1500	47,8	192,0 mm	67,0	125,5	10	1
K- 07 25 00 76	G 1/2	0.5 - 10 bar	3500	68,8	246,0 mm	99,0	149,2	15	2
K- 07 25 00 80	G 3/4	0.5 - 10 bar	3500	68,8	246,0 mm	99,0	149,2	20	2
K- 07 25 00 84	G 1	0.5 - 10 bar	12000	100,0	385,0 mm	128,0	255,7	25	3

Varuosad

K-HALTERBAUSATZ	Holder
K-SCHALTTAFELMUTTER	Nut
K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-METALLBEHAELTER OELER MULTIFIX	Metal tank oiler
K-PC-BEHAELTER FILTER MULTIFIX	Polycarbonate tank filter
K-SCHUTZKORB G	Protective cage
K-VERSCHLEI-SATZ	Set of wearing parts
K-FILTERELEMENT	Filter element
K-AUTOMAT ABLASSVENTIL	Automatic drain valve

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.