


# K-WTEH 3-TLG PC-BEHÄEL SCHUTZK MULT

Service units, 3-piece with polycarbonate bowl and bowl guard

**HANSA FLEX**

## Omadused

|                               |  |
|-------------------------------|--|
| Sisendrõhk                    | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)     |
| Aine temperatuur              | max. 60 °C   |
| Keskonnatemperatuur           | Max. 60 °C   |
| Filterelemendi pooride suurus | 5 µm (BG 1 / BG 2), 40 µm (BG 3)                               |
| Tihendusmaterjal              | NBR  |
| Vedrukate                     | POM-brass  |
| Korpus                        | Die-cast zinc, Aluminium for G 1 variant                       |
| Tilgapüüdur                   | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)           |
| Drain valve                   | Semi-automatic   |
| Läbivoolu väärtuse mõõtmise   | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

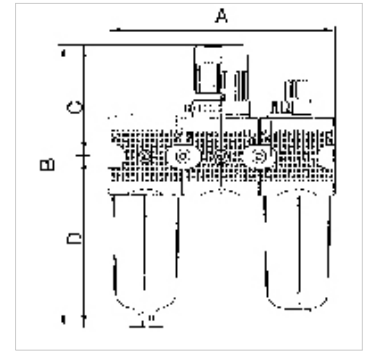

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, centrifugal separator and proportional lubricator.

## Tellimisinfo

3-piece service units are also available in other control ranges (0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

## Lisateave

1500 l/min: P1: 10 bar, P2: 7 bar,  $\Delta p \leq 0.1$  bar.

## Artikkel

| Märgistus      | Keere | Reguleerimisvahemik | Läbivool (L/min) | A (mm) | B        | C (mm) | D (mm) | DN | Ehitussuurus |
|----------------|-------|---------------------|------------------|--------|----------|--------|--------|----|--------------|
| K- 07 25 01 12 | G 1/4 | 0.5 - 10 bar        | 1100             | 137,8  | 192,1 mm | 67,0   | 125,1  | 6  | 1            |
| K- 07 25 01 15 | G 3/8 | 0.5 - 10 bar        | 1100             | 137,8  | 192,1 mm | 67,0   | 125,1  | 10 | 1            |
| K- 07 25 01 18 | G 1/2 | 0.5 - 10 bar        | 3000             | 200,8  | 246,3 mm | 99,0   | 147,3  | 15 | 2            |
| K- 07 25 01 21 | G 3/4 | 0.5 - 10 bar        | 3000             | 200,8  | 246,3 mm | 99,0   | 147,3  | 25 | 2            |
| K- 07 25 01 24 | G 1   | 0.5 - 10 bar        | 11300            | 300,0  | 381,4 mm | 128,0  | 253,8  | 25 | 3            |

## Varuosad

|                                  |                               |
|----------------------------------|-------------------------------|
| K-HALTERBAUSATZ                  | Holder                        |
| K-SCHALTAFELMUTTER               | Nut                           |
| K-HALTERBAUSATZ MULTIFIX         | Holder                        |
| K-KOPPELPAKET MEHR               | Coupling packet               |
| K-KOPPELPAKET SCHMA              | Coupling packet               |
| K-METALLBEHÄELTER OELER MULTIFIX | Metal tank oiler              |
| K-PC-BEHÄELTER FILTER MULTIFIX   | Polycarbonate tank filter     |
| K-SCHUTZKORB G                   | Protective cage               |
| K-TROPFAUFSATZ POLYCARBO 1       | Drip attachment polycarbonate |
| K-TROPFAUFSATZ METALL            | Drip attachment metal         |
| K-FILTERELEMENT                  | Filter element                |
| K-AUTOMAT ABLASSVENTIL           | Automatic drain valve         |
| K-VERSCHLEI-SATZ                 | Set of wearing parts          |