


# K-ANFAV MULTIFIX MINI

Start-up valves

**HANSA FLEX**

## Omadused

Sisendrõhk	Min. 2.5 bar, max. 16 bar
Aine temperatuur	max. 60 °C
Keskonnatemperatuur	Max. 60 °C
Läbivool	1600 l/min
Tihendusmaterjal	NBR
Korpus	Die-cast zinc
Läbivoolu väärtuse mõõtmine	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

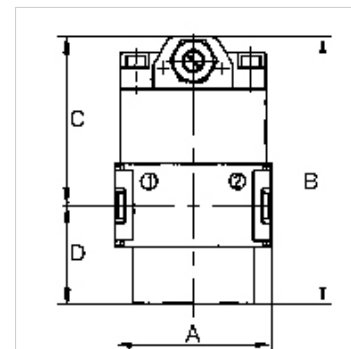

## Vihje

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.

Lisaandmed saate soovi korral.

## Kirjeldus

Seat valves operated by secondary pressure for controlled pressurisation of pneumatic systems. The full cross-section of the regulator is opened at 50% of the input pressure. With adjustable restrictor!

## Artikkel

Märgistus	Keere	A (mm)	B	C (mm)	D (mm)
K- 07 25 11 53	G 1/4	45,0	77,5 mm	48,5	29,0

## Lisatarvikud

K-HALTERBAUSATZ Holder

## Varuosad

K-KOPPELPAKET MEHR Coupling packet