


# K-ANFAV MULTIFIX MINI

Start-up valves

**HANSA FLEX**

## Omadused

|                             |  |
|-----------------------------|--|
| Sisendrõhk                  | Min. 2.5 bar, max. 16 bar                          |
| Aine temperatuur            | max. 60 °C   |
| Keskonnatemperatuur         | Max. 60 °C   |
| Läbivool                    | 1600 l/min   |
| Tihendusmaterjal            | NBR  |
| Korpus                      | Die-cast zinc                                      |
| Läbivoolu väärtuse mõõtmine | At P1 = 6 bar and pressure drop $\Delta p = 1$ bar |

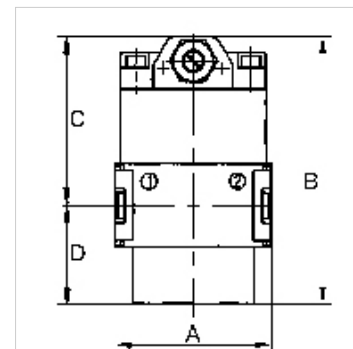

## Vihje

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.

Lisaandmed saate soovi korral.

## Kirjeldus

Seat valves operated by secondary pressure for controlled pressurisation of pneumatic systems. The full cross-section of the regulator is opened at 50% of the input pressure. With adjustable restrictor!

## Artikkel

| Märgistus      | Keere | A<br>(mm) | B       | C<br>(mm) | D<br>(mm) |
|----------------|-------|-----------|---------|-----------|-----------|
| K- 07 25 11 53 | G 1/4 | 45,0      | 77,5 mm | 48,5      | 29,0      |

## Lisatarvikud

K-HALTERBAUSATZ Holder

## Varuosad

K-KOPPELPAKET MEHR Coupling packet