


K-NEBELOELER PC-BEHAEL MULTIFIX MIN

Oil-mist lubricators with polycarbonate bowl

HANSA FLEX

Omadused

| | |
|-----------------------------|--|
| Sisendrõhk | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Aine temperatuur | max. 60 °C |
| Keskonnatemperatuur | Max. 60 °C |
| Läbivool | 1000 l/min |
| Tihendusmaterjal | NBR |
| Korpus | Die-cast zinc |
| Tilgapüüdur | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl) |
| Õlisort | CL 32 acc. to DIN 51517 - ISO VG 32 |
| Läbivoolu väärtuse mõõtmine | At P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

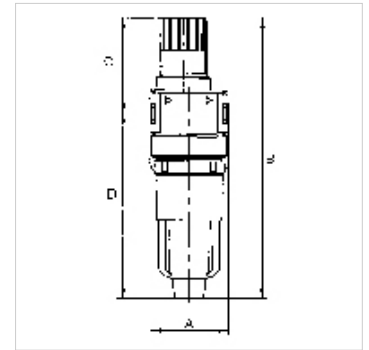

Vihje

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.
Lisaandmed saate soovi korral.

Kirjeldus

Micro-lubricators, oil can be filled under pressure.

Artikkel

| Märgistus | Keere | A (mm) | B | C (mm) | D (mm) | DN | Ehitussuurus |
|----------------|-------|-----------|----------|-----------|-----------|----|--------------|
| K- 07 25 00 87 | G 1/8 | 40,0 | 145,1 mm | 49,6 | 95,5 | 5 | 0 |
| K- 07 25 00 89 | G 1/4 | 40,0 | 145,1 mm | 49,6 | 95,5 | 5 | 0 |

Varuosad

| | |
|------------------------------|--|
| K-AUTOMAT ABLASSVENTIL | Automatic drain valve |
| K-KOPPELPAKET MEHR | Coupling packet |
| K-ERSATZBEHAELTER MULTI MINI | Spare tank »multifix-mini« & »standard-mini« |
| K-TROPFAUFSATZ POLYCARBO 1 | Drip attachment polycarbonate |
| K-TROPFAUFSATZ METALL | Drip attachment metal |