


# K-SCHALTVENTILE 3/2 MULTIFIX MINI

On-off valves (3/2-way valves)

**HANSA FLEX**

## Omadused

Sisendrõhk	Min. 2 bar, max. 10 bar
Aine temperatuur	max. 60 °C
Keskonnatemperatuur	Max. 60 °C
Elektriühendus	Device plug PG 9, type B, EN 175301-803
Kaitse tüüp	IP 65 (P 54) acc. to DIN 40050
Läbivool	1600 l/min
Sisselülituse kestvus suhteline	100 %
Õhutusühendus	Silencer G 1/4
Tihendusmaterjal	NBR
Korpus	Die-cast zinc
Läbivoolu väärtuse mõõtmine	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

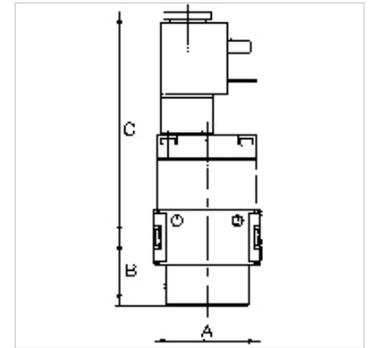

## Vihje

If several devices in the »multiflex-mini« Series are assembled together, the maximum working pressure is 12 bar.  
Lisaandmed saate soovi korral.

## Kirjeldus

Pneumatic systems or parts of systems can be switched on and off by means of an electrical signal. When they are switched off, the system is relieved at the same time.

## Artikkel

Märgistus	Keere	Magnetpool	A (mm)	B	C (mm)	Ehitussuurus
K- 07 25 11 62	G 1/4	230 V AC, 50 Hz	45,0	29,0 mm	96,0	0
K- 07 25 11 63	G 1/4	110 V AC, 50 Hz	45,0	29,0 mm	96,0	0
K- 07 25 11 64	G 1/4	24 V DC	45,0	29,0 mm	96,0	0

## Varuosad

K-KOPPELPAKET MEHR	Coupling packet
K-GERAETESTECKER	Coupling socket
K-AUTOMAT ABLASSVENTIL	Automatic drain valve
K-MAGNETSPULE MULTIFIX	Solenoid
K-SCHALLDAE SINTERBR SCHLITZ	Silencers, sintered bronze, slotted