


K-NEBELOELER MINI

Mini oil-mist lubricator

HANSA**FLEX**

Omadused

Tööröhk	min. 2 bar - max. 6 bar
Aine temperatuur	max. 50 °C
Keskkonnatemperatuur	Max. 50 °C
Läbivoolu suuna paigaldusasend	Oil intake at the lowest point/any
Ölimahuti	Polycarbonate
Ölisort	CL 32 acc. to DIN 51517 - ISO VG 32

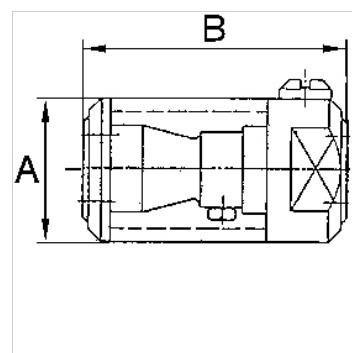

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

For mounting on pneumatic impact tools (nail drivers, tackers, screwdrivers) which work intermittently. Also suitable for tools with continuous compressed air demand (grinding and polishing machines). Fixed drip rate: Approx. 0.4 cm³ per 100 work cycles, one filling = 3000 work cycles. Oil consumption in continuous operation (at 6 bar): 0.15 cm³ / Nm³ (varies depending on ambient temperature and oil used).

Artikel

Märgistus	Keere	A (mm)	B	DN
K- 07 25 09 11	G 1/4	33,0	60,0 mm	8
K- 07 25 09 12	G 3/8	33,0	60,0 mm	8