


K-FI REGL METALLBE MANO STANDARD-MI

Filter regulators with metal bowl, incl. pressure gauge and panel nut

HANSA FLEX

Omadused

| | |
|-------------------------------|--|
| Sisendrõhk | Max. 16 bar (polycarbonate bowl), Max. 25 bar (metal bowl) |
| Aine temperatuur | max. 60 °C |
| Keskkonnamtemperatuur | Max. 60 °C |
| Läbivool | 350 l/min |
| Filterelemendi pooride suurus | 5 µm |
| Tihendusmaterjal | NBR |
| Vedrukate | POM-brass |
| Korpus | Die-cast zinc, painted silver |
| Drain valve | Semi-automatic for variant with polycarbonate bowl, Manual for variant with metal bowl |
| Läbivoolu väärtuse mõõtmine | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

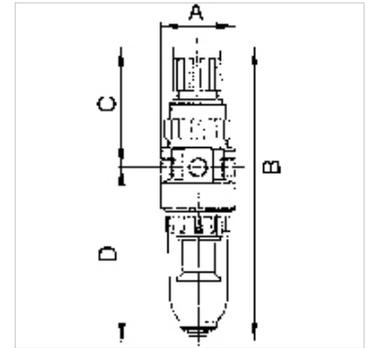

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Compact, reversible diaphragm pressure regulators, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator.

The pressure setting can be locked by pushing the knob down.

Artikkel

| Märgistus | Keere | Reguleerimisvahemik | A (mm) | B | C (mm) | D (mm) | DN |
|----------------|-------|---------------------|-----------|----------|-----------|-----------|----|
| K- 07 25 06 65 | G 1/8 | 0.5 - 10 bar | 40,0 | 163,5 mm | 65,0 | 98,5 | 5 |
| K- 07 25 06 66 | G 1/4 | 0.5 - 10 bar | 40,0 | 163,5 mm | 65,0 | 98,5 | 5 |

Varuosad

| | |
|-------------------------------|---|
| K-HALTERBAUSATZ | Holder |
| K-SCHALTAFELMÜTTER | Nut |
| K-ERSATZBEHAELTER MULTI MINI | Spare tank »multifix-mini« & »standard-mini« |
| K-PC-BEHÄLTER FILTER MULTIFIX | Polycarbonate tank filter |
| K-FILTERELEMENT | Filter element |
| K-AUTOMAT ABLASSVENTIL | Automatic drain valve |
| K-LOESBARE DOPPELNIPPEL MS | Double nipples |
| K-XV AGM MS NI | Double nipples, parallel male thread, nickel-plated brass |
| K-VERSCHLEI-SATZ | Set of wearing parts |