


# K-NEBELOE METALLBEHAE T STANDARD-M'

Oil-mist lubricators with metal bowl and metal sight dome

**HANSA FLEX**

## Omadused

|                             |  |
|-----------------------------|--|
| Sisendrõhk                  | Max. 16 bar (polycarbonate bowl), Max. 25 bar (metal bowl) |
| Aine temperatuur            | max. 60 °C   |
| Keskonnatemperatuur         | Max. 60 °C   |
| Läbivool                    | 650 l/min  |
| Tihendusmaterjal            | NBR  |
| Korpus                      | Die-cast zinc, painted silver                              |
| Tilgapüüdur                 | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)       |
| Õlisort                     | CL 32 acc. to DIN 51517 - ISO VG 32                        |
| Läbivoolu väärtuse mõõtmine | At P1 = 6 bar and pressure drop $\Delta p = 1$ bar         |
| Muud andmed                 | User manual on request                                     |

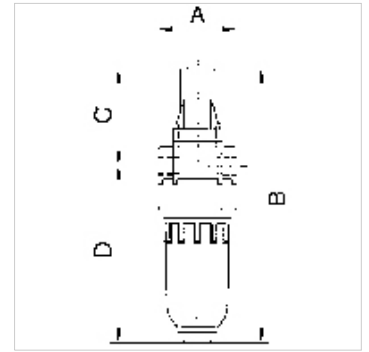

## Kirjeldus

Proportional lubricators in compact design, oil can be filled under pressure.

## Artikkel

| Märgistus      | Keere | A<br>(mm) | B        | C<br>(mm) | D<br>(mm) | DN |
|----------------|-------|-----------|----------|-----------|-----------|----|
| K- 07 25 08 84 | G 1/8 | 40,0      | 141,0 mm | 49,0      | 92,0      | 5  |
| K- 07 25 08 86 | G 1/4 | 40,0      | 141,0 mm | 49,0      | 92,0      | 5  |

## Varuosad

|                              |   |
|------------------------------|---|
| K-ERSATZBEHAELTER MULTI MINI | Spare tank »multifix-mini« & »standard-mini«              |
| K-TROPFAUFSATZ POLYCARBO     | Drip attachment polycarbonate                             |
| K-TROPFAUFSATZ METALL        | Drip attachment metal                                     |
| K-LOESBARE DOPPELNIPPEL MS   | Double nipples  |
| K-XV AGM MS NI               | Double nipples, parallel male thread, nickel-plated brass |