


# K-NEBELOELER METALLBEHAE S T VARIOB

Oil-mist lubricators with metal bowl, incl. sight glass and metal sight dome

**HANSA FLEX**

## Omadused

<b>Sisendrõhk</b>	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
<b>Aine temperatuur</b>	max. 50 °C
<b>Keskkonnatemperatuur</b>	Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl)
<b>Tihendusmaterjal</b>	NBR
<b>Korpus</b>	Die-cast zinc
<b>Tilgapüüdur</b>	PA
<b>Õlisort</b>	CL 32 acc. to DIN 51517 - ISO VG 32
<b>Läbivoolu väärtuse mõõtmine</b>	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

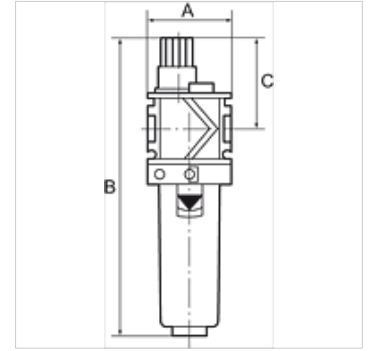

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Proportional lubricators, oil can be filled under pressure. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

## Tellimisinfo

Oil-mist lubricators are also available with bowl guard or metal bowl.

## Artikkel

Märgistus	Keere	Läbivool (L/min)	A (mm)	B	C (mm)
K- 07 25 09 14	G 1/4	3400	48,0	180,0 mm	60,0
K- 07 25 09 16	G 3/8	4400	48,0	180,0 mm	60,0
K- 07 25 09 18	G 1/2	4600	70,0	224,0 mm	65,0
K- 07 25 09 20	G 3/4	7500	70,0	224,0 mm	65,0
K- 07 25 09 22	G 1	7500	124,0	224,0 mm	65,0

## Varuosad

<b>K-ERSATZBEHAELTER VARIOBLOC POLY</b>	Spare tank Polycarbonat
<b>K-TROPFAUFSATZ VARIOBLOC</b>	Drip attachment
<b>K-TROPFAUFSATZ METALL</b>	Drip attachment metal