


K-WTEH 2-TLG PC-BEHAEL VARIOBLOC

Service units, 2-piece with polycarbonate bowl

HANSA FLEX

Omadused

| | |
|-------------------------------------|-----------------------------------------------------------------|
| Sisendrõhk | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Aine temperatuur | max. 50 °C |
| Keskonnatemperatuur | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl) |
| Filtrelemendi pooride suurus | 40 µm |
| Tihendusmaterjal | NBR |
| Vedrukate | POM |
| Korpus | Die-cast zinc |
| Membran | NBR |
| Tilgapüüdur | PA |
| Drain valve | Manual |
| Läbivoolu väärtuse mõõtmine | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

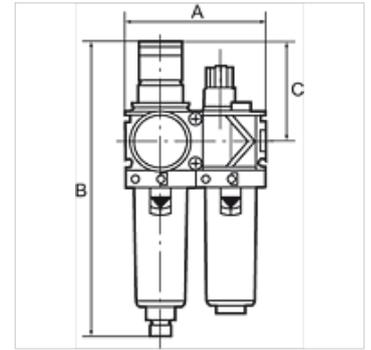

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Two or three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

Tellimisinfo

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges (0.5 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

Lisateave

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges.

Artikkel

| Märgistus | Keere | Reguleerimisvahemik | Läbivool (L/min) | A (mm) | B | C (mm) |
|----------------|-------|---------------------|------------------|--------|----------|--------|
| K- 07 25 13 85 | G 1/4 | 0.5 - 10 bar | 1500 | 96,0 | 203,0 mm | 68,0 |
| K- 07 25 13 87 | G 3/8 | 0.5 - 10 bar | 1800 | 96,0 | 203,0 mm | 68,0 |
| K- 07 25 13 89 | G 1/2 | 0.5 - 10 bar | 3400 | 140,0 | 273,0 mm | 98,0 |
| K- 07 25 13 91 | G 3/4 | 0.5 - 10 bar | 5000 | 140,0 | 273,0 mm | 98,0 |
| K- 07 25 13 93 | G 1 | 0.5 - 10 bar | 5000 | 194,0 | 273,0 mm | 98,0 |

Varuosad

| | |
|----------------------------------|------------------------------------------------|
| K-VERSCHLEI-SATZ VARIOBLOC | Set of wearing parts |
| K-FILTRELEMENT VARIOBLOC | Filter element |
| K-TROPFAUFSATZ VARIOBLOC | Drip attachment |
| K-ERSATZBEHAELTER VARIOBLOC POLY | Spare tank Polycarbonat |
| K-ABLASSVENTIL AUTO | Fully-automatic drain valve with Adapter G 1/8 |
| K-TROPFAUFSATZ METALL | Drip attachment metal |