


# K-KDR SCHNVERSCHR

Mini pressure regulators, discharge port on thread, quick-lock screw fitting

**HANSA FLEX**

## Omadused

|  |                                    |
|--|------------------------------------|
| Reguleerimisvahemik                        | 0 - 8 bar                          |
| Sisendrõhk                                 | Max. 10 bar                        |
| Temperatuuri ulatus                        | 0 °C to +70 °C                     |
| Õõneskrüvi, Illgõndvars, reguleerimiskrüvi | Nickel-plated brass                |
| Sisedetail                                 | Brass with a bare metal surface    |
| O-rõngas huultihõnd                        | NBR                                |
| Tihõndid (kadumatu)                        | Polyamide (glass fibre-reinforced) |

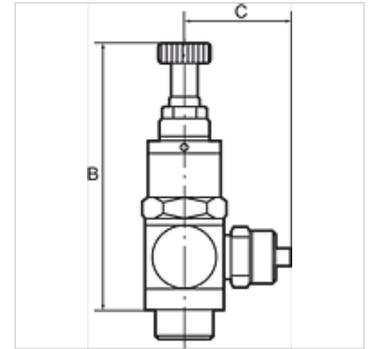

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Piston pressure regulator with self-relieving design, hollow bolt and pivoting ring piece. The regulator is screwed directly into the consumer (e.g. cylinder, handling equipment, etc.). The working pressure can thus be adapted to the specific application.

## Artikkel

| Märgistus      | C<br>(mm) | Vooliku jaoks | Keere | SW    | B<br>(mm) |
|----------------|-----------|---------------|-------|-------|-----------|
| K- 07 25 08 33 | 16,0      | G 1/8 IG      | G 1/8 | 15 mm | 56,0      |
| K- 07 25 08 34 | 25,0      | 5 mm / 3 mm   | G 1/8 | 15 mm | 56,0      |
| K- 07 25 08 35 | 25,0      | 6 mm / 4 mm   | G 1/8 | 15 mm | 56,0      |
| K- 07 25 08 36 | 25,0      | 8 mm / 6 mm   | G 1/8 | 15 mm | 56,0      |
| K- 07 25 08 31 | 26,5      | 6 mm / 4 mm   | G 1/4 | 17 mm | 63,0      |
| K- 07 25 08 32 | 27,5      | 8 mm / 6 mm   | G 1/4 | 17 mm | 63,0      |
| K- 07 25 08 30 | 28,5      | 10 mm / 8 mm  | G 1/4 | 17 mm | 63,0      |