


# K-RUNDZYLINDER EINF O D

Miniature cylinders, single-acting (magnetic, non-cushioned)

**HANSA FLEX**

## Omadused

|                     |   |
|---------------------|---|
| Vahendid            | Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| Töörõhk             | Max. 10 bar   |
| Rõhk                | 0,8 bar (Ø 8 bis Ø 12), 0,6 bar (Ø 16 bis Ø 25)   |
| Temperatuuri ulatus | -10 °C to +80 °C  |
| Ehitus              | Flanged joint between stainless steel barrel and heads  |
| Kolvivarras         | C45 steel, hard chrome-plated   |
| Toru                | Stainless steel 1.4301  |
| Kolb                | Synthetic (acetal) resin  |
| Tihendusmaterjal    | NBR   |

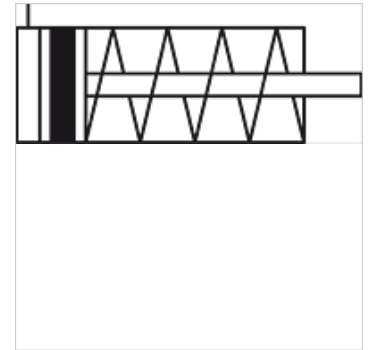

## Vihje

Maximum recommended stroke: Double-acting: Ø 8 - Ø 10 = 100 stroke, Ø 12 - Ø 16 = 200 stroke, Ø 20 - Ø 25 = 250 stroke

Single-acting: Ø 8 - Ø 25 = 50 stroke. Longer stroke lengths can cause operational malfunctions.

Lisaandmed saate soovi korral.

## Kirjeldus

Single and double-acting cylinders, with magnetic piston.

## Lisateave

Important: The scope of supply does not include a connector. Please order separately.

## Artikkel

| Märgistus      | Kolbide Ø | Keskpunkt (mm) | Ühendus | Kolvivarda keere |
|----------------|-----------|----------------|---------|------------------|
| K- 07 15 17 11 | 8 mm      | 10             | M 5     | M 4              |
| K- 07 15 17 12 | 8 mm      | 25             | M 5     | M 4              |
| K- 07 15 17 13 | 8 mm      | 50             | M 5     | M 4              |
| K- 07 15 17 14 | 10 mm     | 10             | M 5     | M 4              |
| K- 07 15 17 15 | 10 mm     | 25             | M 5     | M 4              |
| K- 07 15 17 16 | 10 mm     | 50             | M 5     | M 4              |
| K- 07 15 17 17 | 12 mm     | 10             | M 5     | M 6              |
| K- 07 15 17 18 | 12 mm     | 25             | M 5     | M 6              |
| K- 07 15 17 19 | 12 mm     | 50             | M 5     | M 6              |
| K- 07 15 17 20 | 16 mm     | 10             | M 5     | M 6              |
| K- 07 15 17 21 | 16 mm     | 25             | M 5     | M 6              |
| K- 07 15 17 22 | 16 mm     | 50             | M 5     | M 6              |
| K- 07 15 17 23 | 20 mm     | 10             | G 1/8   | M 8              |
| K- 07 15 17 24 | 20 mm     | 25             | G 1/8   | M 8              |
| K- 07 15 17 25 | 20 mm     | 50             | G 1/8   | M 8              |
| K- 07 15 17 26 | 25 mm     | 10             | G 1/8   | M 10 x 1.25      |
| K- 07 15 17 27 | 25 mm     | 25             | G 1/8   | M 10 x 1.25      |
| K- 07 15 17 28 | 25 mm     | 50             | G 1/8   | M 10 x 1.25      |

## Lisatarvikud

|                             |                                      |
|-----------------------------|--------------------------------------|
| K-FUSSBEFESTIGUNG 5         | Foot model                           |
| K-FLANSCHBEFESTIGUNGEN1     | Flange model                         |
| K-KOPFMUTTER DECKEL BODEN 2 | Hexagon nut (for head)               |
| K-GABELKOEPF 3              | Fork model                           |
| K-GELENKAUGEN 2             | Rod eye model                        |
| K-SCHWENKLAGER 1            | Counter-hinge model                  |
| K-SENSORHALTER              | Sensor support (with T-slot adapter) |
| K-SENSOREN T-NUT 1          | Sensor for T-slot                    |