

K-VHRO IS OR MS NI

Hexagon socket screw plugs with O-ring

HANSA FLEX


Omadused

Töötemperatuur Max. 80 °C (with O-ring, NBR)

Surve Max. 60 bar

Tüüp Sisekuuskandiga polt

Materjal Nikeldatud messing

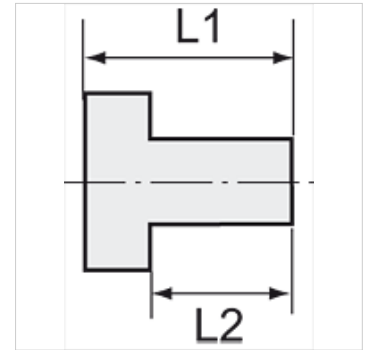

Vihje

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.

Lisaandmed saate soovi korral.

Kirjeldus

Suitable for air, water, oil, steam, etc.

Lisateave

Further types and dimensions on request.

Artikkel

Märgistus	Keere	Sisekuuskant (mm)	L1 (mm)	L2 (mm)
K- 07 40 39 91	M 5	2,5	6,5	4,0
K- 07 40 39 92	G 1/8	3,0	9,5	7,0
K- 07 40 39 93	G 1/4	6,0	11,0	8,0
K- 07 40 39 94	G 3/8	8,0	12,5	9,0
K- 07 40 39 95	G 1/2	10,0	14,5	11,0
K- 07 40 44 09	G 3/4	17,0	20,0	15,5
K- 07 40 44 10	G 1	19,0	21,0	16,0