

# K-DRG MINI O SEKUNDAERENTLUEFTUNG

Mini pressure regulators

**HANSA FLEX**

## Omadused

Temperatuuri ulatus -20 °C to +60 °C

Surve Max. 12 bar


Rõhuvahemik Max. 12 bar

Temperatuur -20 °C to +60 °C

Läbivool 0 - 400 l/min

Vedru Stainless-steel

Korpus Brass

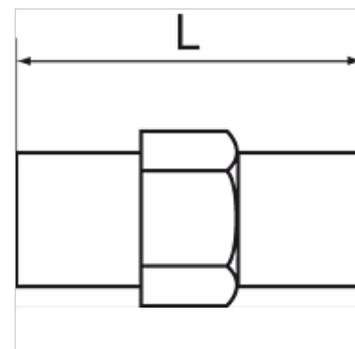

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

This preset pressure regulator guarantees optimal pressure conditions, especially in blow guns. The pressure regulator is inserted into the compressed air line. Fits onto any 1/4" thread and maintains the pressure at optimum, thus helping to reduce the costs for energy. Tamper-proof.

## Artikkel

Märgistus	Keere	Eelseadistatud töö rõhk	L (mm)
K- 07 25 03 03	G 1/4 außen/male	2 bar	24,0
K- 07 25 03 04	G 1/4 außen/male	4 bar	24,0
K- 07 25 03 05	G 1/4 außen/male	6 bar	24,0