



K-DRG MINI O SEKUNDAERENTLUEFTUNG

Mini pressure regulators

HANSA FLEX

Omadused

Temperatuuri ulatus	-20 °C to +60 °C
Surve	Max. 12 bar
Rõhuvahemik	Max. 12 bar
Temperatuur	-20 °C to +60 °C
Läbivool	0 - 400 l/min
Vedru	Stainless-steel
Korpus	Brass

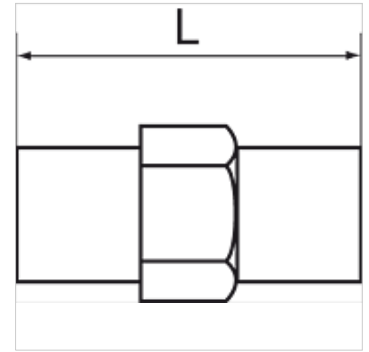

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

This preset pressure regulator guarantees optimal pressure conditions, especially in blow guns. The pressure regulator is inserted into the compressed air line. Fits onto any 1/4" thread and maintains the pressure at optimum, thus helping to reduce the costs for energy. Tamper-proof.

Artikkel

Märgistus	Keere	Eelseadistatud töö rõhk	L (mm)
K- 07 25 03 03	G 1/4 außen/male	2 bar	24,0
K- 07 25 03 04	G 1/4 außen/male	4 bar	24,0
K- 07 25 03 05	G 1/4 außen/male	6 bar	24,0