
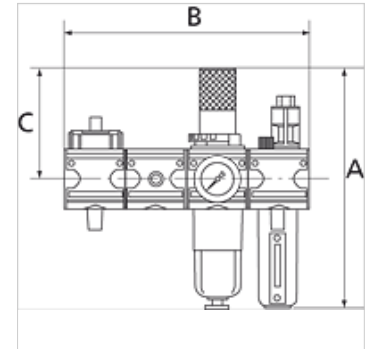


K-WTST SAFETY BKR SCHA AN 2T MULTI

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and 2-piece service unit with lock cylinder

HANSA FLEX

| Omadused | |
|-----------------------------|----------------------------------------------------------------|
| Sisendrõhk | 2 - 16 bar |
| Väljundrõhk | 0.5 - 10 bar |
| Temperatuuri ulatus | Max. 60 °C |
| Vahendid | Suruõhk |
| Tihendusmaterjal | NBR |
| Mahuti | Polycarbonate (with bayonet lock) and bowl guard |
| Vedrukate | POM |
| Filterelement | Cellpor (PE) 5 µm |
| Korpus | Die-cast zinc |
| Membraan | NBR |
| Drain valve | Semi-automatic |
| Läbivoolu väärtuse mõõtmine | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| Muud andmed | see data sheets of the individual components (on request) |
| Õhutust. ühend. Kuulkraan | Silencer |



Kirjeldus

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

Tellimisinfo

The price does not include a padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit.

Artikkel

| Märgistus | Keere | Läbivool (L/min) | A (mm) | B | C (mm) | Kondensaadi väljalaskeava |
|----------------|-------|------------------|--------|----------|--------|---------------------------|
| K- 07 25 15 17 | G 1/4 | 1000 | 219,1 | 182,8 mm | 94,0 | Semi-automatic |
| K- 07 25 15 18 | G 1/2 | 3550 | 269,3 | 266,8 mm | 122,0 | Semi-automatic |
| K- 07 25 15 19 | G 1 | 9800 | 410,8 | 382,8 mm | 157,0 | Semi-automatic |