



# K-XRD STECKANSCHLUSS Z SCH AGR OR

Straight non-return valves, flow direction from port to tube, parallel male thread with O-ring

**HANSA FLEX**

## Omadused

Töö rõhk	Max. 10 bar, vacuum
Rakendusvaldkond	Air, vacuum
soovitatud voolikud	PU or PA (nylon)
Vahendid	Suruõhk
Tavaline	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring
Temperatuuri ulatus	0 °C to +60 °C
Tihenduspid	O-ring (NBR)
Materjal	Plastic, Nickel plated brass
Surverõngas	Plastic

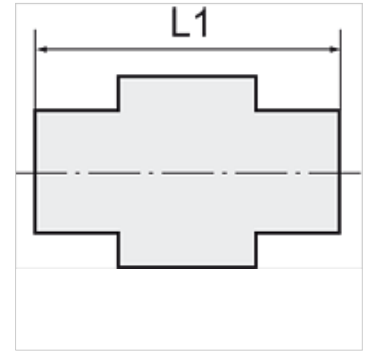

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

The non-return function of these push-in fittings prevents the air from flowing back. The unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

## Artikkel

Märgistus	Keere	vooliku välimise-Ø jaoks (mm)	L1 (mm)	Avamissurve (bar)	SW
K- 07 40 08 73	M 5	4 mm	31,0	0,2	10 mm
K- 07 40 08 68	G 1/8	4 mm	24,2	0,2	14 mm
K- 07 40 08 69	G 1/8	6 mm	31,0	0,2	14 mm
K- 07 40 08 70	G 1/8	8 mm	32,8	0,2	14 mm
K- 07 40 08 66	G 1/4	6 mm	33,0	0,2	17 mm
K- 07 40 08 67	G 1/4	8 mm	34,8	0,2	17 mm
K- 07 40 08 71	G 3/8	10 mm	41,0	0,2	20 mm
K- 07 40 08 72	G 3/8	12 mm	42,5	0,2	21 mm
K- 07 40 08 64	G 1/2	10 mm	43,0	0,2	24 mm
K- 07 40 08 65	G 1/2	12 mm	44,5	0,2	24 mm