K-RUNDZYLINDER DOPP O E D MI


Round cylinders, double-acting, with magnet, non-cushioned, »MI« Series

HANSA-FLEX

Omadused

Vahendid	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Tööröhk	1 - 10 bar (double-acting); 2 - 10 bar (single-acting)
Temperatuuri ulatus	-20 °C to +70 °C
Kolvivarras	Stainless steel 1.4301
Rakendamine	Type "CA" = ground cover with threaded pin - swivel design Type "CM" = ground cover with threaded pin round - swivel design
Kolb	Stainless steel 1.4305 (8 to 12 mm); Alu (16 to 40 mm)
Tihendusmaterjal	NBR
Silindritoru	Stainless steel 1.4301



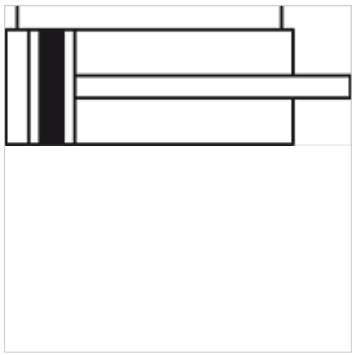

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Circular cylinder in stainless steel in different versions: Series "MI" double-acting, Ø 8 – 25 in accordance with ISO 6432
Series "MI" double-acting, Ø 32 - 40

Artikkel

Märgistus	Kolbide Ø	Keskpunkt (mm)	Rakendamine	Kolvivarda Ø (mm)	Kolvivarda väliskeere
K- 07 15 17 90	8 mm	10	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 91	8 mm	15	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 92	8 mm	20	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 93	8 mm	25	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 94	8 mm	30	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 95	8 mm	40	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 96	8 mm	50	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 97	8 mm	60	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 98	8 mm	75	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 99	8 mm	80	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 00	8 mm	100	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 01	8 mm	125	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 02	8 mm	150	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 03	10 mm	10	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 04	10 mm	15	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 05	10 mm	20	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 06	10 mm	25	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 07	10 mm	30	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 08	10 mm	40	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 09	10 mm	50	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 10	10 mm	60	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 11	10 mm	75	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 12	10 mm	80	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 13	10 mm	100	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 14	10 mm	125	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 15	10 mm	150	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 16	10 mm	160	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 17	10 mm	175	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 18	10 mm	200	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 19	12 mm	10	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 20	12 mm	15	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 21	12 mm	20	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 22	12 mm	25	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 23	12 mm	30	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 24	12 mm	40	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 25	12 mm	50	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 26	12 mm	60	»CA« type, acc. to ISO 6432	6	M 6 x 1

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.

K-RUNDZYLINDER DOPP O E D MI

Round cylinders, double-acting, with magnet, non-cushioned, »MI« Series

HANSA-FLEX

Artikkel

Märgistus	Kolbide Ø	Keskpunkt (mm)	Rakendamine	Kolvivarda Ø (mm)	Kolvivarda väliskeere
K- 07 15 18 27	12 mm	75	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 28	12 mm	80	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 29	12 mm	100	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 30	12 mm	125	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 31	12 mm	150	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 32	12 mm	160	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 33	12 mm	175	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 34	12 mm	200	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 35	12 mm	250	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 36	16 mm	10	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 37	16 mm	15	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 38	16 mm	20	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 39	16 mm	25	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 40	16 mm	30	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 41	16 mm	40	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 42	16 mm	50	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 43	16 mm	60	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 44	16 mm	75	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 45	16 mm	80	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 46	16 mm	100	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 47	16 mm	125	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 48	16 mm	150	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 49	16 mm	160	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 50	16 mm	175	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 51	16 mm	200	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 52	16 mm	250	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 53	16 mm	300	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 54	20 mm	10	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 55	20 mm	15	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 56	20 mm	20	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 57	20 mm	25	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 58	20 mm	30	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 59	20 mm	40	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 60	20 mm	50	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 61	20 mm	60	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 62	20 mm	75	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 63	20 mm	80	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 64	20 mm	100	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 65	20 mm	125	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 66	20 mm	150	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 67	20 mm	160	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 68	20 mm	175	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 69	20 mm	200	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 70	20 mm	250	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 71	20 mm	300	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 72	20 mm	350	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 73	20 mm	400	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 74	20 mm	450	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 75	20 mm	500	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 76	20 mm	600	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 77	25 mm	10	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 78	25 mm	15	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 79	25 mm	20	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 80	25 mm	25	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 81	25 mm	30	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 82	25 mm	40	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 83	25 mm	50	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 84	25 mm	60	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 85	25 mm	75	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 86	25 mm	80	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 87	25 mm	100	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 88	25 mm	125	»CA« type, acc. to ISO 6432	10	M 10 x 1.25

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.

K-RUNDZYLINDER DOPP O E D MI

Round cylinders, double-acting, with magnet, non-cushioned, »MI« Series

HANSA-FLEX

Artikkel

Märgistus	Kolbide Ø	Keskpunkt (mm)	Rakendamine	Kolvivarda Ø (mm)	Kolvivarda väliskeere
K- 07 15 18 89	25 mm	150	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 90	25 mm	160	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 91	25 mm	175	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 92	25 mm	200	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 93	25 mm	250	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 94	25 mm	300	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 95	25 mm	350	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 96	25 mm	400	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 97	25 mm	450	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 98	25 mm	500	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 99	25 mm	600	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 19 00	32 mm	10	»CM« type	12	M 10 x 1.25
K- 07 15 19 01	32 mm	15	»CM« type	12	M 10 x 1.25
K- 07 15 19 02	32 mm	20	»CM« type	12	M 10 x 1.25
K- 07 15 19 03	32 mm	25	»CM« type	12	M 10 x 1.25
K- 07 15 19 04	32 mm	30	»CM« type	12	M 10 x 1.25
K- 07 15 19 05	32 mm	40	»CM« type	12	M 10 x 1.25
K- 07 15 19 06	32 mm	50	»CM« type	12	M 10 x 1.25
K- 07 15 19 07	32 mm	60	»CM« type	12	M 10 x 1.25
K- 07 15 19 08	32 mm	75	»CM« type	12	M 10 x 1.25
K- 07 15 19 09	32 mm	80	»CM« type	12	M 10 x 1.25
K- 07 15 19 10	32 mm	100	»CM« type	12	M 10 x 1.25
K- 07 15 19 11	32 mm	125	»CM« type	12	M 10 x 1.25
K- 07 15 19 12	32 mm	150	»CM« type	12	M 10 x 1.25
K- 07 15 19 13	32 mm	160	»CM« type	12	M 10 x 1.25
K- 07 15 19 14	32 mm	175	»CM« type	12	M 10 x 1.25
K- 07 15 19 15	32 mm	200	»CM« type	12	M 10 x 1.25
K- 07 15 19 16	32 mm	250	»CM« type	12	M 10 x 1.25
K- 07 15 19 17	32 mm	300	»CM« type	12	M 10 x 1.25
K- 07 15 19 18	32 mm	350	»CM« type	12	M 10 x 1.25
K- 07 15 19 19	32 mm	400	»CM« type	12	M 10 x 1.25
K- 07 15 19 20	32 mm	450	»CM« type	12	M 10 x 1.25
K- 07 15 19 21	32 mm	500	»CM« type	12	M 10 x 1.25
K- 07 15 19 22	32 mm	600	»CM« type	12	M 10 x 1.25
K- 07 15 19 23	40 mm	10	»CM« type	16	M 12 x 1.25
K- 07 15 19 24	40 mm	15	»CM« type	16	M 12 x 1.25
K- 07 15 19 25	40 mm	20	»CM« type	16	M 12 x 1.25
K- 07 15 19 26	40 mm	25	»CM« type	16	M 12 x 1.25
K- 07 15 19 27	40 mm	30	»CM« type	16	M 12 x 1.25
K- 07 15 19 28	40 mm	40	»CM« type	16	M 12 x 1.25
K- 07 15 19 29	40 mm	50	»CM« type	16	M 12 x 1.25
K- 07 15 19 30	40 mm	60	»CM« type	16	M 12 x 1.25
K- 07 15 19 31	40 mm	75	»CM« type	16	M 12 x 1.25
K- 07 15 19 32	40 mm	80	»CM« type	16	M 12 x 1.25
K- 07 15 19 33	40 mm	100	»CM« type	16	M 12 x 1.25
K- 07 15 19 34	40 mm	125	»CM« type	16	M 12 x 1.25
K- 07 15 19 35	40 mm	150	»CM« type	16	M 12 x 1.25
K- 07 15 19 36	40 mm	160	»CM« type	16	M 12 x 1.25
K- 07 15 19 37	40 mm	175	»CM« type	16	M 12 x 1.25
K- 07 15 19 38	40 mm	200	»CM« type	16	M 12 x 1.25
K- 07 15 19 39	40 mm	250	»CM« type	16	M 12 x 1.25
K- 07 15 19 40	40 mm	300	»CM« type	16	M 12 x 1.25
K- 07 15 19 41	40 mm	350	»CM« type	16	M 12 x 1.25
K- 07 15 19 42	40 mm	400	»CM« type	16	M 12 x 1.25
K- 07 15 19 43	40 mm	450	»CM« type	16	M 12 x 1.25
K- 07 15 19 44	40 mm	500	»CM« type	16	M 12 x 1.25
K- 07 15 19 45	40 mm	600	»CM« type	16	M 12 x 1.25

Lisatarvikud

K-FUSSBEFESTIGUNG TYP LB 1	Foot model, »LB« type
K-FLANSCHBEFESTIGUNG TYP FA3	Flange model, »FA« type
K-SCHWENKLAGER TYP SDB	Counter-hinge model, »SDB« type

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.