
K-T-VB PP
Union tees

Omadused

Tööröhk	on request
Töötemperatuur	Max. +20 °C
Materjal	Polypropylene (PP)
Tihendusmaterjal	NBR



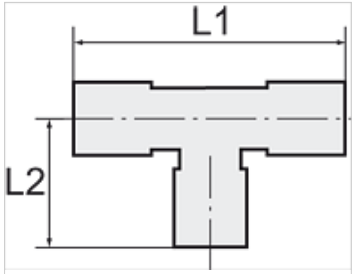

Vihje
Lisaandmed saate soovi korral.

Kirjeldus
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artikkel

Märgistus	vooliku välimise-Ø jaoks (mm)	L1 (mm)	L2 (mm)
K- 07 40 28 73	32 mm	199,4	99,7

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.